


STANDARD PARKING STALL LAYOUT N.T.S.

ASPHALT PARKING LOT
 40mm OF HL3 ASPHALT
 COMPACTED TO 98% S.P.D.
 60mm OF HL8 ASPHALT
 COMPACTED TO 98% S.P.D.
 CAST IN PLACE CONCRETE
 CURB OPSD 600.03
 TYPE J: 0.084 m/m
 150mm OF TOPSOIL
 AND SOD

150mm OF GRANULAR 'A'
 COMPACTED TO 98% S.P.D.
 300mm OF GRANULAR 'B'
 COMPACTED TO 98% S.P.D.
 BACKFILL WITH GRANULAR 'A'
 COMPACTED TO 98% S.P.D.
 COMPACTED SUBGRADE

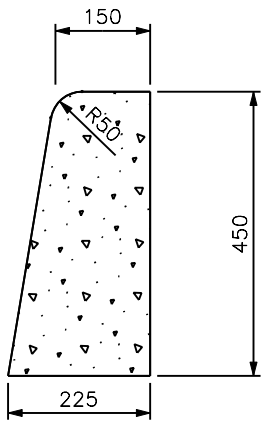

NOTES:

1. 1.5m WIDE ACCESSIBLE CURB RAMP/CURB DEPRESSION TO BE LOCATED PROXIMATE TO ACCESSIBLE PARKING SPACES PER COMMUNITY SERVICES' REPRESENTATIVE'S DIRECTION.
2. SUBGRADE TO BE SLOPED AT 2% MIN TO FACILITATE DRAINAGE AND TO BE APPROVED PRIOR BY COMMUNITY SERVICES PRIOR TO APPLICATION OF GRANULAR BASE
3. GRANULAR BASE 'A' TO BE SLOPED AT 2% AND SUBJECT TO APPROVAL BY COMMUNITY SERVICES
4. ALL GRANULAR MATERIAL TO BE COMPACTED TO 98% S.P.D.
5. SUBGRADE TO BE COMPACTED TO 98% S.P.D.
6. COMPACTION TESTS ARE TO BE SUBMITTED TO COMMUNITY SERVICES PRIOR TO ACCEPTANCE
7. ASPHALT SURFACE TO BE SMOOTH AND EVEN THROUGHOUT
8. ALL DIMENSIONS ARE IN MILLIMETERS
9. PARKING STALL LINES (WHITE) AND ACCESSIBLE PARKING SYMBOL (YELLOW) TO BE 100mm WIDE USING REGULAR DRY TRAFFIC PAINT.



SCALE: N.T.S.
 DATE: MARCH 2, 2006
 DRAWN BY: P & D
 NUMBER: 02510-3

ASPHALT PARKING LOT WITH C.I.P. CURB