



METRIC
ALL DIMENSIONS IN MILLIMETRES



NOTES

1. PIPE TO BE PERFORATED CORRUGATED PLASTIC PIPE WITH GEOTEXTILE AS PER O.P.S.S. 405, AND O.P.S.S. 1860.
2. GRANULAR FILTER MATERIAL TO BE CITY STD 2112.II0 OR 6mm WASHED CHIP CITY STD 2112.III (IF APPROVED). RECLAIMED PORTLAND CEMENT OR ASPHALT PAVEMENT IS NOT ALLOWED. (CONSISTENT WITH PART B).
3. TO BE READ IN CONJUNCTION WITH O.P.S.S. 405

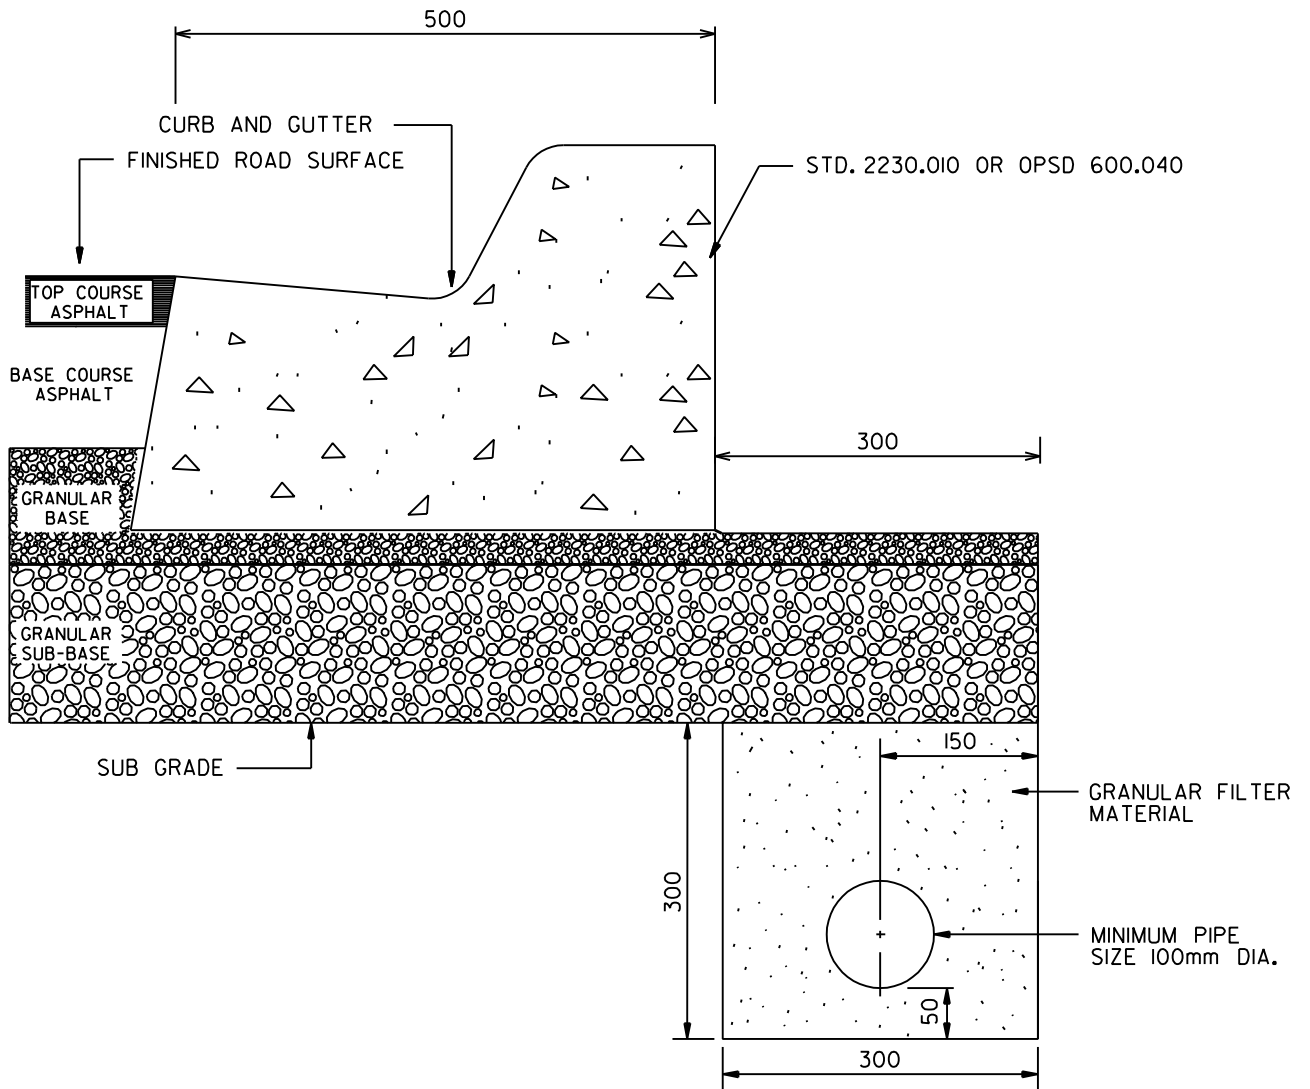

MISSISSAUGA
Leading today for tomorrow

**STANDARD
SUBDRAINS**

EFF. DATE	2002-01-01	SCALE	N.T.S.
REV.	5	STANDARD No. 2220.040	