




METRIC
ALL DIMENSIONS IN MILLIMETRES

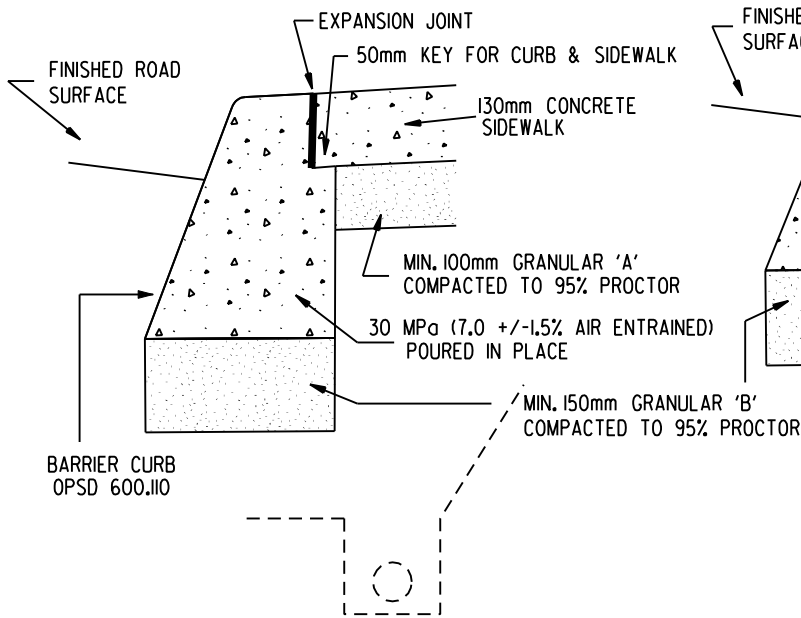

SECTION A-A
N.T.S.

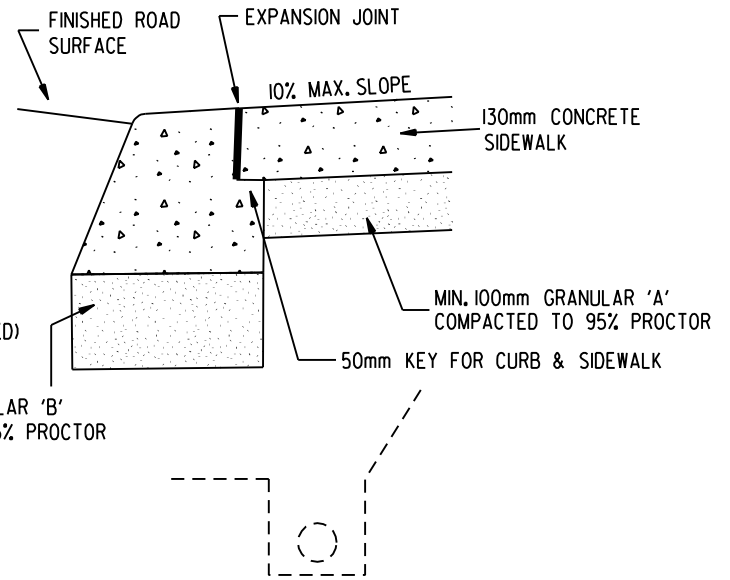

SECTION B-B
N.T.S.

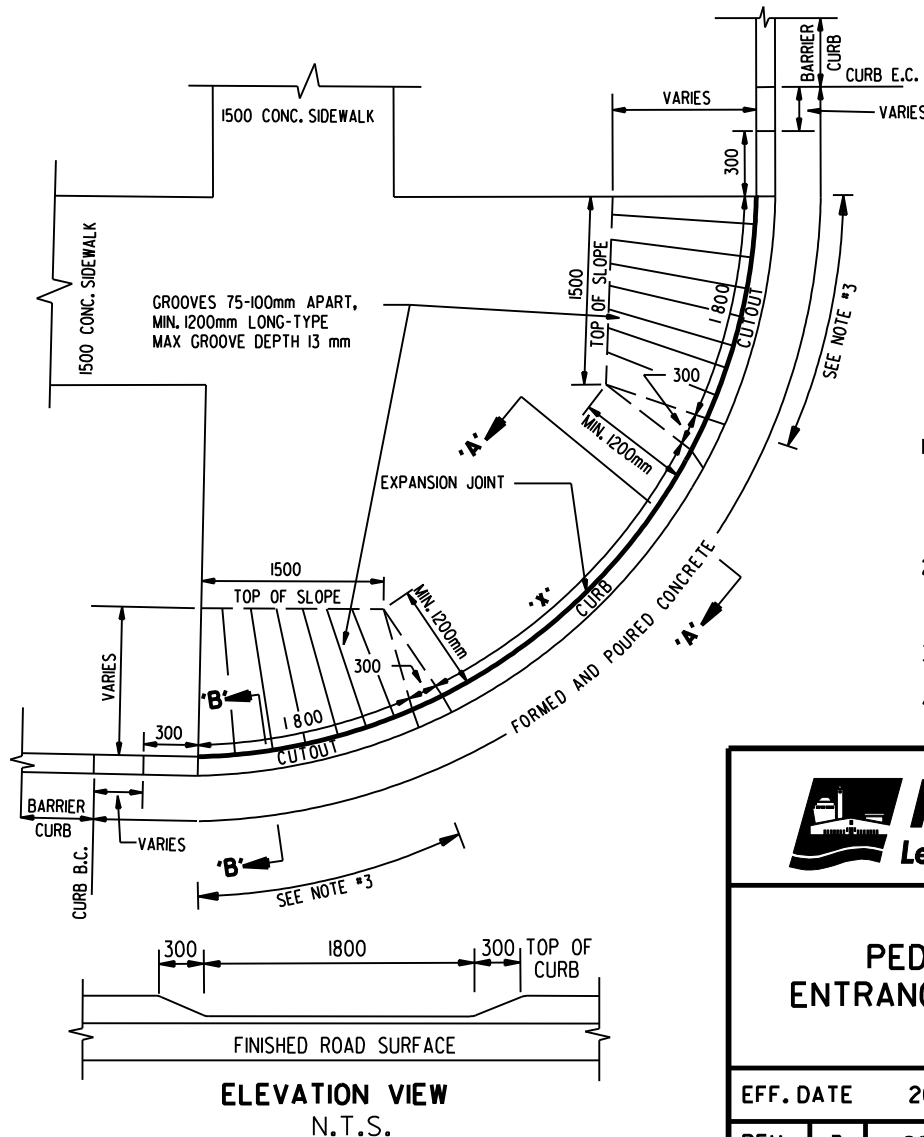

ELEVATION VIEW
N.T.S.

NOTES:

1. 'X' - 900mm MINIMUM. IF LESS THAN 900mm CONTINUOUS DROPPED CURB MAY BE REQUIRED AT DISCRETION OF THE COMMISSIONER OF TRANSPORTATION & WORKS
2. THIS STANDARD TO BE USED IN CONJUNCTION WITH CITY OF MISSISSAUGA STANDARD DRAWING No. 2240.010 AND OPSD 600.11
3. NO CATCHBASINS TO BE LOCATED IN THIS AREA
4. GROOVES TO ALIGN DIRECTIONALLY WITH CROSSWALKS



MISSISSAUGA
Leading today for tomorrow

**STANDARD
PEDESTRIAN SIDEWALK
ENTRANCES AT INTERSECTIONS
BARRIER CURB**

EFF. DATE	2002-01-01	SCALE	N.T.S.
REV.	3	2006-01-01	STANDARD No. 2240.020