


METRIC  
ALL DIMENSIONS IN MILLIMETRES



NOTES

1. PATHWAY SURFACE IS TO BE SMOOTH AND EVEN THROUGHOUT
2. ALL COMPACTION TO BE 98% S.P.D. UNLESS OTHERWISE NOTED
3. ALL DEMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.
4. THIS DETAIL TO BE USED IN CONJUNCTION WITH THE APPROVED LAYOUT DRAWING.
5. WHERE ASPHALT PATHWAY ABUTS CONCRETE SPLASHPAD OR CURB, ASPHALT SURFACE IS TO BE FLUSH WITH THE TOP OF SPLASHPAD OR CURB.

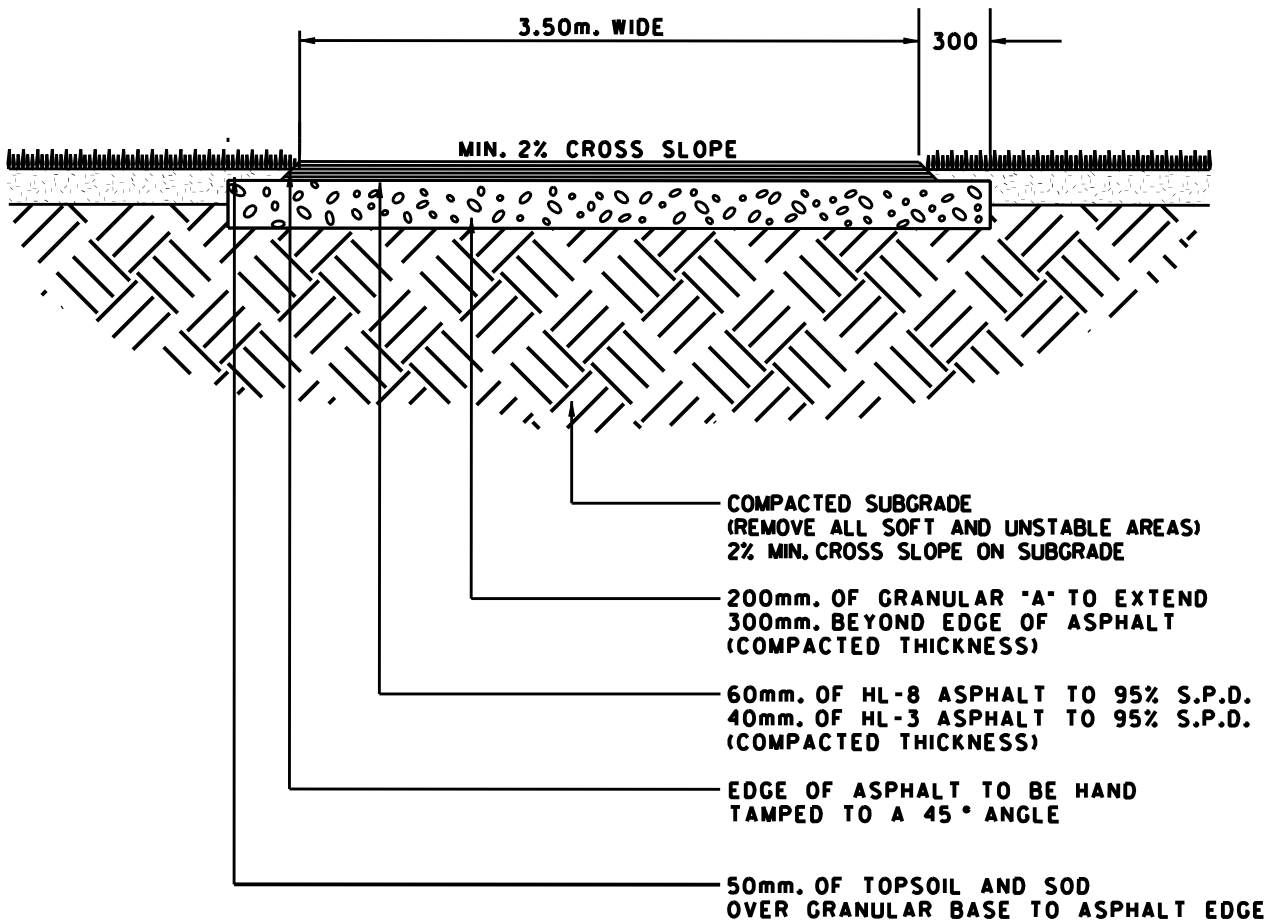

STANDARD  
ASPHALT MULTI-USE PATHWAY  
(BOULEVARDS)

EFF. DATE		SCALE	N.T.S.
REV.		STANDARD No. 2240.051	