
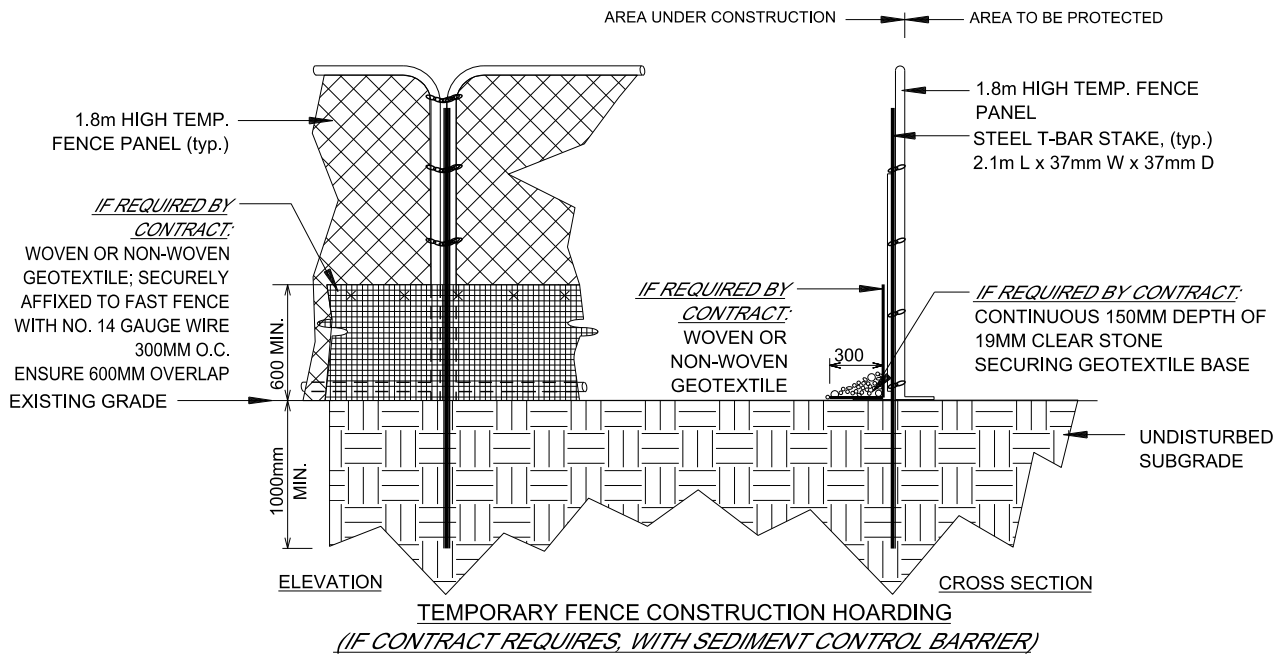


02830-5

Hoarding Modular Construction Hoarding

NOTE:
TO BE USED AS A GUIDELINE ONLY.
NOT TO SCALE. REMOVE CITY TITLE BLOCK
AND REDRAW TO REPRESENT SITE SPECIFIC
CONDITIONS. ALL SITE SPECIFIC CONDITIONS
ARE TO BE CONFIRMED BY THE PROJECT
CONSULTANT.

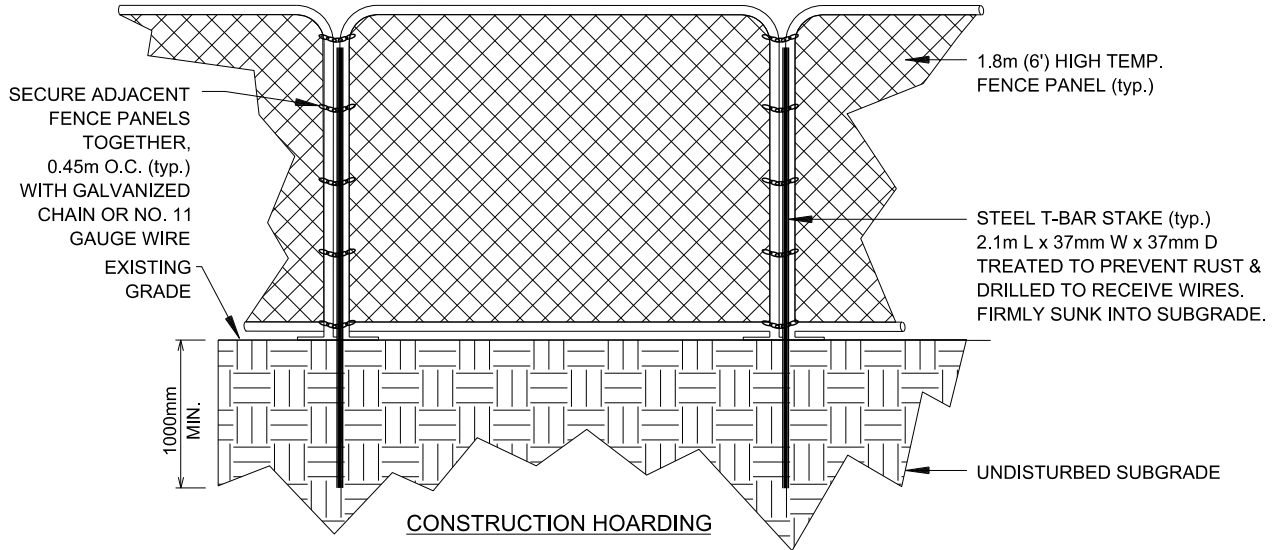

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.
2. HOARDING MUST BE SUPPLIED, INSTALLED AND MAINTAINED BY THE APPLICANT AND/OR CONTRACTOR IN SOUND FUNCTIONING CONDITION THROUGHOUT ALL PHASES OF CONSTRUCTION AND SITE PRESERVING, UNTIL APPROVAL TO REMOVE HOARDING IS OBTAINED FROM THE COMMUNITY SERVICES DEPARTMENT
3. NO RECYCLED CHAIN LINK FENCING OR POSTS PERMITTED.
4. HOARDING TO BE INSPECTED/APPROVED BY AND BE INSTALLED TO THE SATISFACTION OF THE COMMUNITY SERVICES DEPARTMENT PRIOR TO ANY EARTH-DISTURBING ON SITE ACTIVITIES.
5. FOR WOVEN OR NON-WOVEN GEOTEXTILE: MIN. OPENING SIZE 0.15mm AND MAX OPENING SIZE 0.25mm
6. DO NOT ALLOW WATER TO COLLECT AND POND BEHIND OR WITHIN HOARDING.
7. REFER TO CONTRACT AND/OR DRAWINGS: SEDIMENT CONTROL BARRIER COMPONENTS MAY NOT BE REQUIRED. THESE INCLUDE THE SUPPLY AND INSTALLATION OF THE GEOTEXTILE FABRIC, AFFIXING OF SAME TO THE FAST FENCE, AND THE 150mm CONTINUOUS DEPTH OF CLEAR STONE.
8. LOCATES ARE REQUIRED PRIOR TO INSTALLATION/DRIVING OF STEEL BARS