


METRIC

ALL DIMENSIONS IN MILLIMETRES

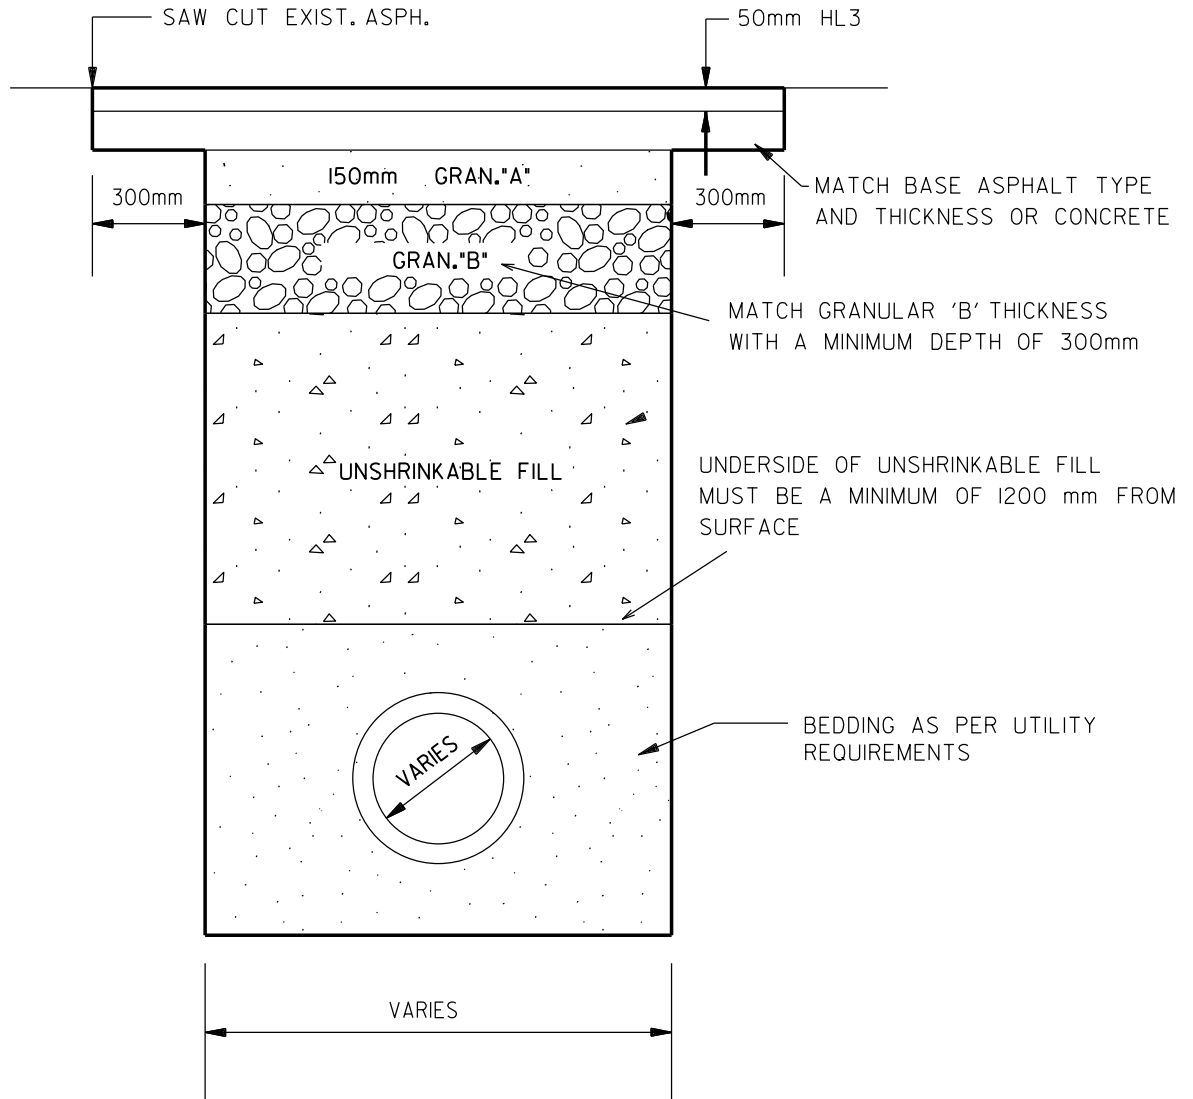

NOTES

1. ALL GRANULAR MATERIALS SHALL BE COMPACTED TO 98% STANDARD PROCTOR DENSITY AT OPTIMUM WATER CONTENT
2. UNSHRINKABLE FILL TO EXTEND FROM TOP OF UTILITY BEDDING TO BOTTOM OF GRANULAR "B"
3. SEE NOTES ON STD. 2220.032 FOR ADDITIONAL DETAILS
4. GRANULAR "A" TO BE OPSS 1010 - 19mm CRUSHER RUN LIMESTONE
5. GRANULAR "B" TO BE OPSS 1010 - TYPE 2 50mm CRUSHER RUN LIMESTONE



MISSISSAUGA

STANDARD TRENCH RESTORATION FOR OPEN CUT UTILITY INSTALLATION UNDER ROADWAYS

EFF. DATE	2002-01-01	SCALE	N.T.S.
REV.	5	2022-09-27	STANDARD No. 2220.030