


METRIC
ALL DIMENSIONS IN METRES

OUTLET SIZE	A	B	C	D	E	F
900	1050	900	900	675	375	10
1050	1200	1050	1050	825	450	10
1200	1350	1200	1200	975	525	10
1350	1500	1350	1150	1025	600	10
1500	1650	1500	1200	1125	675	10
1650	1800	1650	1260	1230	750	10
1800	1950	1800	1320	1335	825	10
2150	2300	2150	1450	1575	1000	20
2450	2600	2450	1550	1775	1150	20
2750	2900	2750	1640	1970	1300	20
3050	3200	3050	1730	2165	1450	30
3350	3500	3350	1820	2410	1600	30
3650	3800	3650	1900	2550	1750	30

CENTRE BRACKET TO BE USED WHEN OUTLET SIZE IS 1500 OR GREATER,
TO ASSEMBLE CENTRE BRACKET TO WALL USE 16mm SELF DRILL ANCHORS THROUGHOUT WITH 16mm S.S. STUDS NUTS & WASHERS, TACK WELD HEAD OF NUTS STUDS & WASHERS ON COMPLETION TO PREVENT REMOVAL.

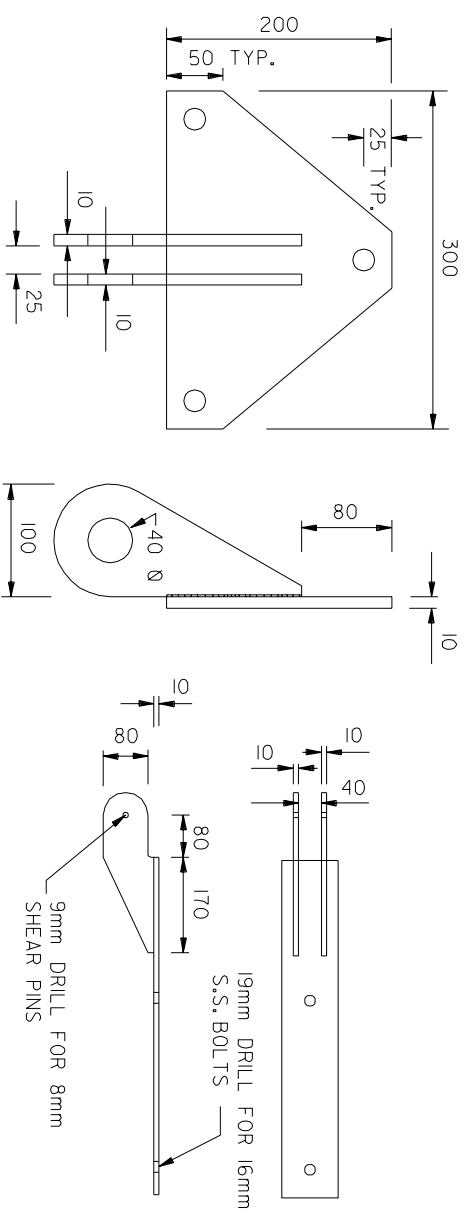

- NOTES-**
1. ALL STEEL MATERIAL HOT DIP GALVANIZED AFTER FABRICATION.
 2. DIMENSIONS FOR 10mm BACK PLATE TO BE THE SAME AS BRACKET.
 3. FOR END BRACKET 16mm BOLTS ARE TO BE PLACED THROUGH WALL AND BOLTED TO A 10mm BACK PLATE



STANDARD
SWING GRATE
FOR STORM OUTLETS
900 Ø TO 3650 Ø

EFF. DATE	2002-01-01	SCALE	N.T.S.
REV.		STANDARD No.	2112.120