


HEIGHT DETAIL

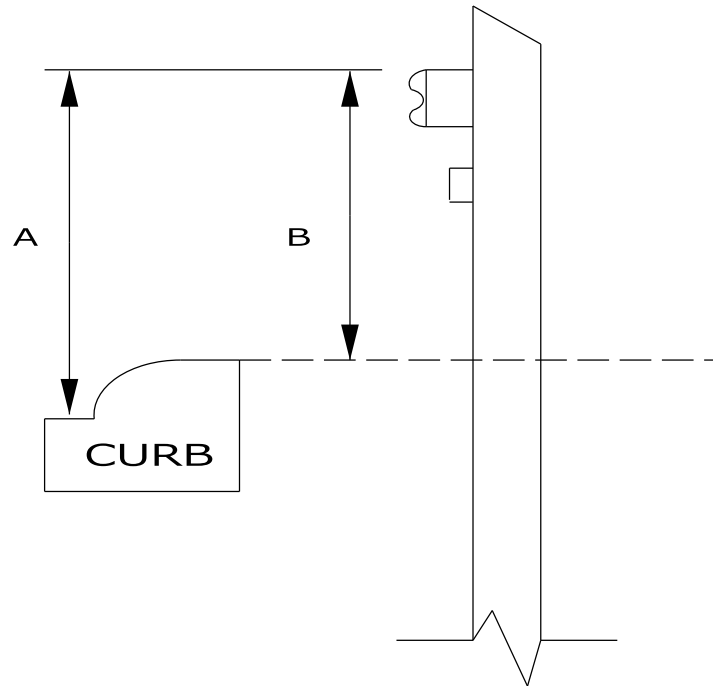

MEASUREMENT 'A':  
WHERE FACE OF STEEL BEAM IS 300mm OR LESS FROM GUTTER-LINE.

- 685 TO 735mm WITHOUT CHANNEL
- 735 TO 785mm WITH CHANNEL

MEASUREMENT 'B':  
WHERE FACE OF STEEL BEAM IS MORE THAN 300mm BEYOND GUTTER-LINE.

- 685 TO 735mm WITHOUT CHANNEL
- 735 TO 785mm WITH CHANNEL

NOTES

1. WASHER SHALL NOT BE INSTALLED AT FRONT FACE OF RAIL. ONE BOLT LOCATED AT CENTRE OF STEEL BEAM GUIDE RAIL.
2. WOODEN POSTS AND OFFSET BLOCKS SHALL BE 190X190mm. TOPS TO HAVE 25mm CHAMFER.
3. STEEL BEAM GUIDE RAIL MOUNTING HEIGHTS SHALL BE AS SPECIFIED IN OPSS 721.07.03.
4. THIS CITY STANDARD IS TO BE READ IN CONJUNCTION WITH OPSD 912.101, 912.102 & 912.140.
5. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SHOWN.



GUIDE RAIL SYSTEM, STEEL BEAM  
WOODEN POST ASSEMBLY  
INSTALLATION - SINGLE RAIL

EFF. DATE MARCH 2015		SCALE	N.T.S.
REV.	1	APRIL 2017	STANDARD No.2200.030