



METRIC
ALL DIMENSIONS IN MILLIMETRES

TANGENT

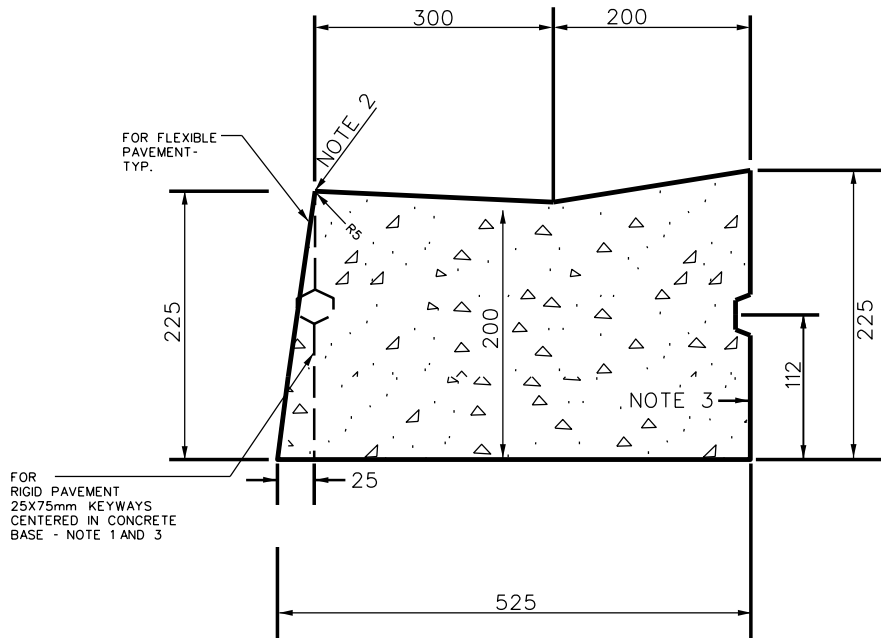

SUPERELEVATED

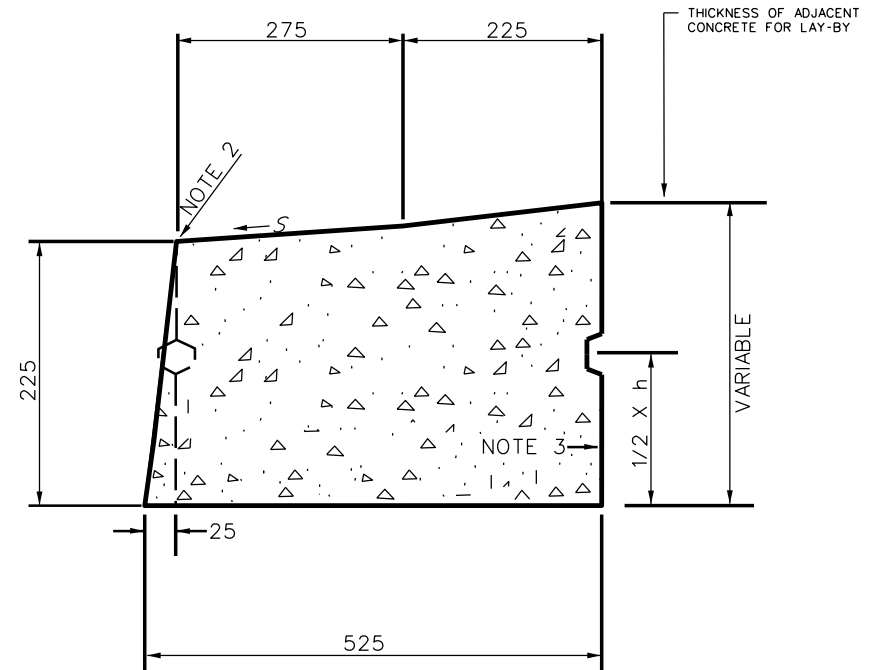

LEGEND:

S -RATE OF PAVEMENT SUPERELEVATION IN PERCENT, %

NOTES:

1. WHEN CURB AND GUTTER IS ADJACENT TO CONCRETE PAVEMENT OR BASE, THIS DRAWING IS TO BE USED IN CONJUNCTION WITH OPSD 552.010 AND 552.020.
2. FLEXIBLE AND COMPOSITE PAVEMENT SHALL BE PLACED 5mm ABOVE THE ADJACENT EDGE OF GUTTER.
3. FOR SLIPFORMING PROCEDURE, A 5% BATTER IS ACCEPTABLE.
- A. TREATMENT AT ENTRANCES SHALL BE ACCORDING TO OPSD 351.010.
- B. OUTLET TREATMENT SHALL BE ACCORDING TO THE OPSD 610 SERIES.
- C. THE TRANSITION FROM ONE CURB TYPE TO ANOTHER SHALL BE A MINIMUM LENGTH OF 3.0m.
- D. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SHOWN.



STANDARD
MOUNTABLE CONCRETE CURB
WITH STANDARD GUTTER AT
BUS & PARKING LAY-BYS

EFF. DATE	2016-08-30	SCALE	N.T.S.
REV.		STANDARD No.	2230.030