


NOTES:

- A. 3.0m MINIMUM FOR SIGNALIZED INTERSECTIONS, 2.5m MINIMUM FOR NON SIGNALIZED INTERSECTIONS WITH PEDESTRIAN CROSSING PAVEMENT MARKINGS, 2.1m MINIMUM FOR NON SIGNALIZED INTERSECTIONS WITHOUT PEDESTRIAN CROSSING PAVEMENT MARKINGS.
- 1. REFER TO 2240.037 FOR INFORMATION ABOUT THE LOCATION OF DROPPED CURBS.
- 2. TACTILE WALKING SURFACE INDICATORS ARE TO BE PLACED 150mm FROM BACK OF CURB TO THE FRONT END CORNERS. A MAXIMUM SPACING OF 200mm FROM THE BACK OF CURB TO THE FRONT EDGE OF THE TACTILE PLATE IS ALLOWED.

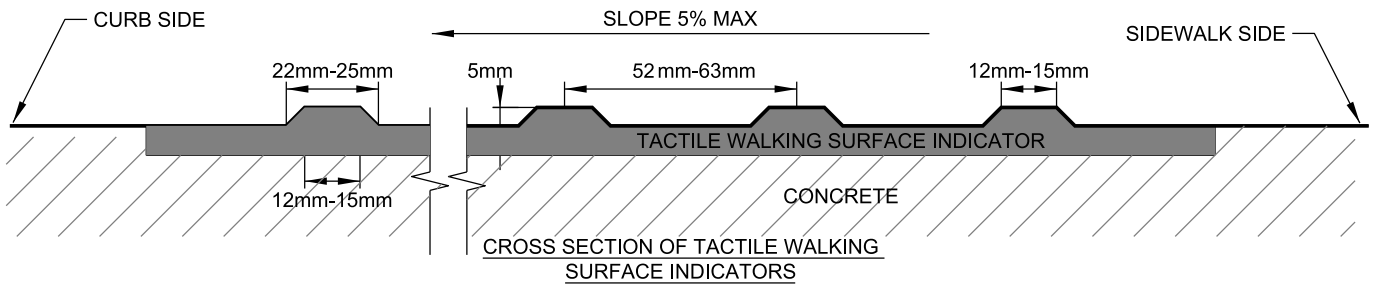

TACTILE WALKING SURFACE INDICATOR AND DEPRESSED CURB DETAIL

EFF. DATE	DEC 2015	SCALE	N.T.S.
REV.		STANDARD No.	2240.035

All dimensions are in millimetres unless otherwise shown.