



TACTILE WALKING SURFACE INDICATOR AND CURB RAMP

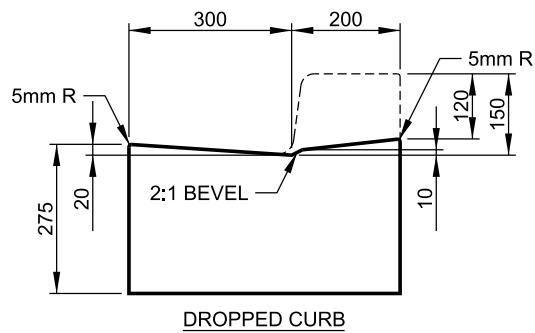

NOTES:

- A. 3.0m MINIMUM FOR SIGNALIZED INTERSECTIONS, 2.5m MINIMUM FOR NON SIGNALIZED INTERSECTIONS WITH PEDESTRIAN CROSSING PAVEMENT MARKINGS, 2.1m MINIMUM FOR NON SIGNALIZED INTERSECTIONS WITHOUT PEDESTRIAN CROSSING PAVEMENT MARKINGS.
 - B. 1.2m MINIMUM FOR TRANSITIONS BETWEEN FULL HEIGHT CURB AND 120mm DROPPED CURB, 0.45m MINIMUM FOR TRANSITIONS BETWEEN 120mm DROPPED CURB AND 75mm DROPPED CURB.
1. REFER TO 2240.037 FOR INFORMATION ABOUT THE LOCATION OF DROPPED CURBS.
 2. TACTILE WALKING SURFACE INDICATORS ARE TO BE PLACED 150mm FROM BACK OF CURB TO THE FRONT END CORNERS. A MAXIMUM SPACING OF 200mm FROM THE BACK OF CURB TO THE FRONT EDGE OF THE TACTILE PLATE IS ALLOWED.

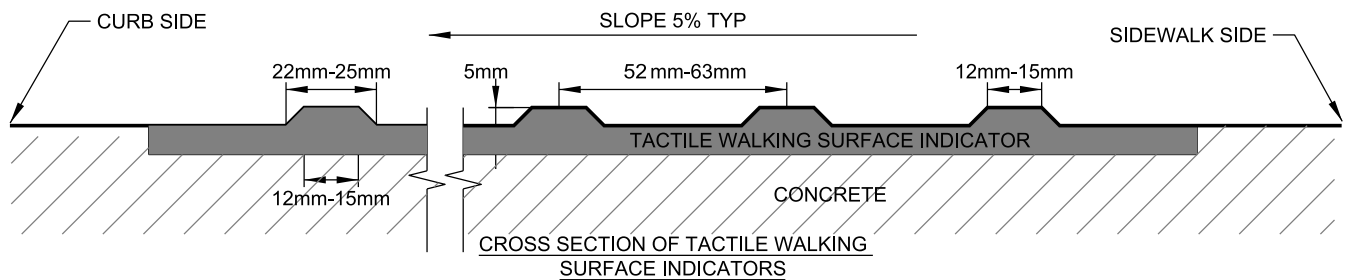

TACTILE WALKING SURFACE INDICATOR AND CURB RAMP DETAIL

EFF. DATE	DEC 2015	SCALE	N.T.S.
REV.		STANDARD No.	2240.036

All dimensions are in millimetres unless otherwise shown.