



OPTION A (ONE-WAY CYCLE TRACK; ADJACENT TO CURB)

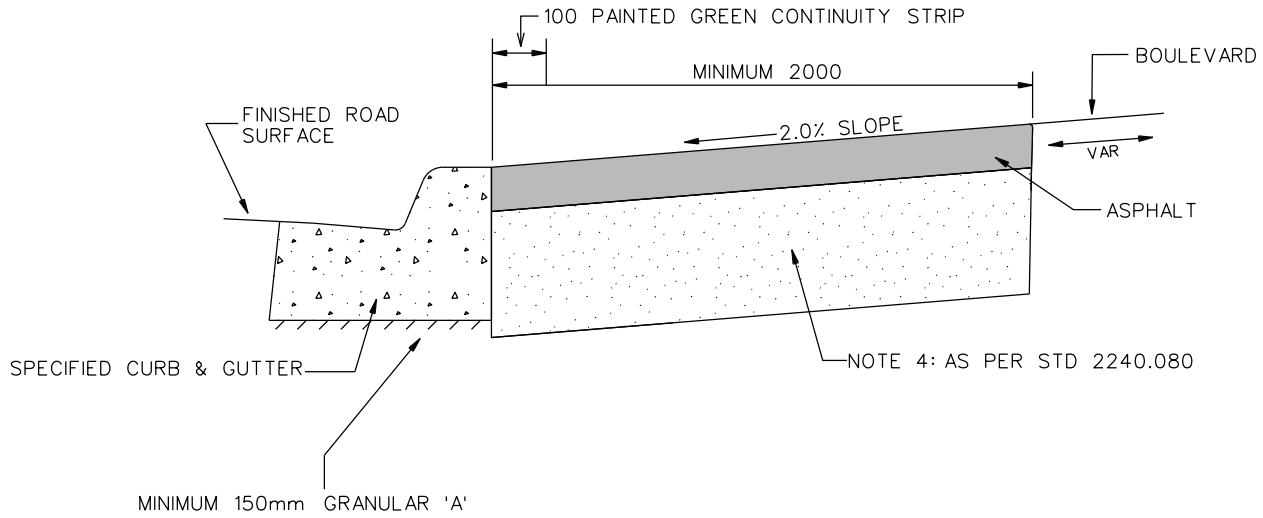

OPTION B (ONE-WAY CYCLE TRACK WITH SPLASH PAD)

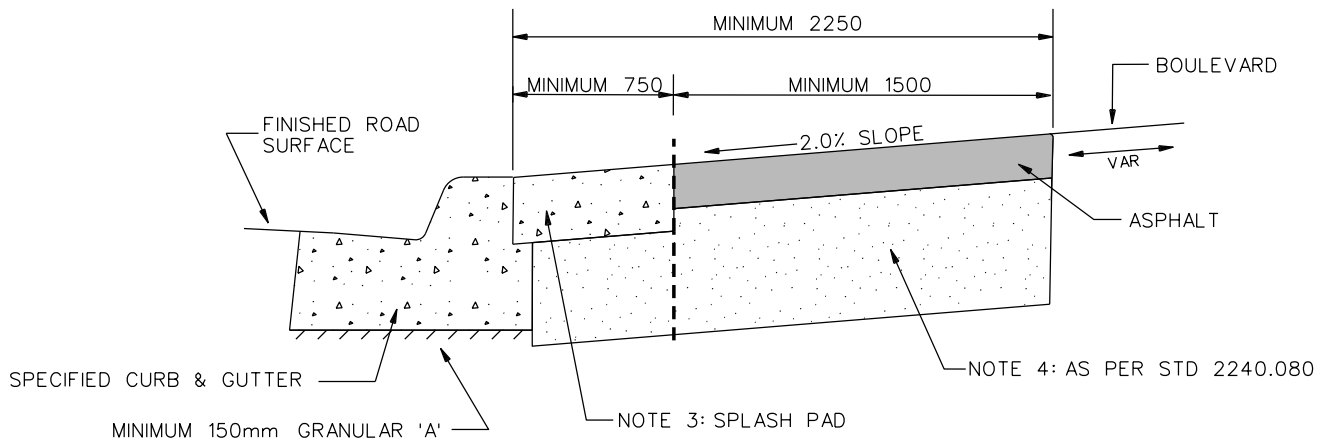

NOTES:

1. REFERENCE ONTARIO TRAFFIC MANUAL(OTM) BOOK 18, FOR GUIDANCE ON SIGNAGE AND PAVMENT MARKINGS FOR ONE-WAY CYCLE TRACKS.
2. MINIMUM WIDTH OF 2000mm INCLUDING 100mm PAINTED GREEN CONTINUITY STRIP REQUIRED WHEN ADJACENT TO THE CURB (**OPTION A**).
3. MINIMUM WIDTH OF 1500mm ADJACENT TO MINIMUM 750mm SPLASH PAD (**OPTION B**).
4. FOR SURFACE TREATMENT DETAILS REFER TO CITY STANDARD STD. 2240.080 (MULTI-USE TRAIL).
5. THIS STANDARD MAY BE READ IN CONJUNCTION WITH APPLICABLE STANDARD ROAD CROSS SECTION.



STANDARD
ONE WAY CYCLE TRACK
(IN BOULEVARD)

EFF. DATE	2016-02-26	SCALE	N.T.S.
REV.		STANDARD No.	2240.081