


FARSIDE OF INTERSECTION
 BUS STOP
 FOR STANDARD 12.2m (40') BUS

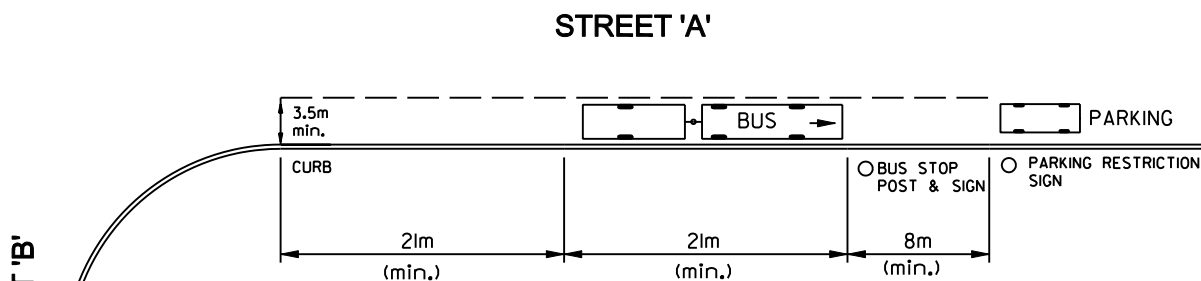

FARSIDE OF INTERSECTION
 BUS STOP
 FOR ARTICULATED 18.3m (60') BUS

NOTES:

1. NOT TO SCALE
2. FOR CONCRETE CURB AND GUTTER REFER TO CITY STANDARD DWG. No. 2230.010 AND OPSD 600.040
3. FOR BUS PAD AND PLATFORM DETAILS REFER TO CTIY STANDARDS DWG. No. 2250.010 TO 2250.050
4. WHERE RIGHT TURN FOR BUSES IS REQUIRED, ENTRANCE DIMENSION SHALL BE INCREASED BY 15m.
5. BUS STOP POST MUST BE A MINIMUM OF 0.60m FROM FACE OF CURB.
6. MINIMUM 2% CROSS-SLOPE (perpendicular) REQUIRED.
7. ALL DIMENSIONS ARE IN METERS UNLESS OTHERWISE SHOWN.



**BUS STOP
 FAR SIDE**

EFF. DATE: APRIL 2010		SCALE:	N.T.S.
REV.	1	DRAWN: JFA	STANDARD No. 2260.020