



STREET 'A'

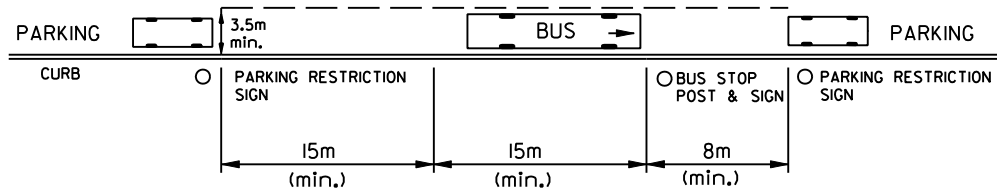

MIDBLOCK OF INTERSECTIONS
 BUS STOP
 FOR STANDARD 12.2m (40') BUS

STREET 'A'

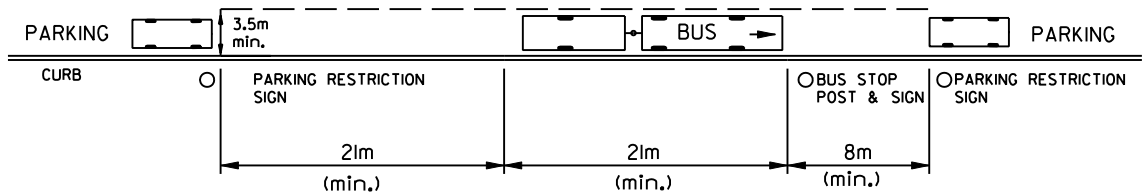

MIDBLOCK OF INTERSECTIONS
 BUS STOP
 FOR ARTICULATED 18.3m (60') BUS



NOTES:

1. NOT TO SCALE
2. FOR CONCRETE CURB AND GUTTER REFER TO CITY STANDARD DWG. No. 2230.010 AND OPSD 600.040
3. FOR BUS PAD AND PLATFORM DETAIL REFER TO CITY STANDARD DWG. No. 2250.010 TO 2250.050
4. BUS STOP POST MUST BE A MINIMUM OF 0.60m FROM FACE OF CURB.
5. MINIMUM 2% CROSS-SLOPE (perpendicular) REQUIRED.
6. ALL DIMENSIONS ARE IN METERS UNLESS OTHERWISE SHOWN.



**BUS STOP
 MIDBLOCK**

EFF. DATE: APRIL 2010		SCALE:	N.T.S.
REV.	1	DRAWN: JFA	STANDARD No. 2260.030