




POLE & CONDUIT LOCATION & ALIGNMENT

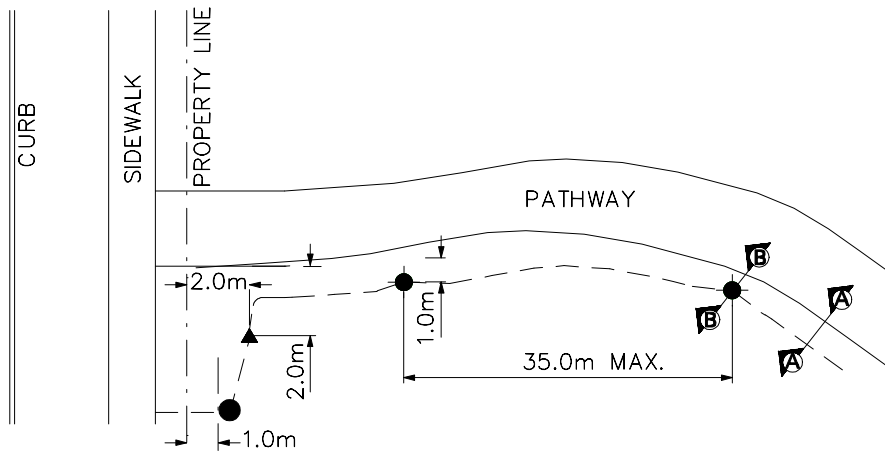

KEY	
▲	POWER PEDESTAL IS OFFSET 2.0m FROM PROPERTY LINE AND 2.0m FROM PATHWAY EDGE
●	ELECTRICAL HANDWELL IS TO BE OFFSET 1.0m FROM THE PROPERTY LINE SEE DETAIL 16530-7
●	PATHWAY POLE IS TO BE OFFSET 0.60m FROM PATHWAY EDGE
---	CONDUIT IS OFFSET 1.0m FROM PATHWAY EDGE

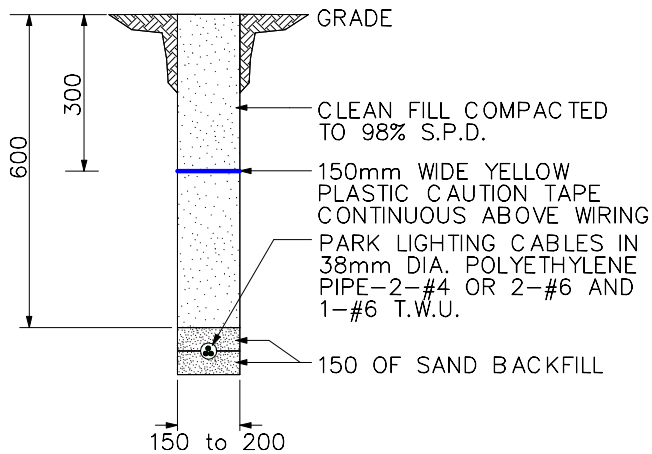

SECTION A - A TRENCH CONDUIT

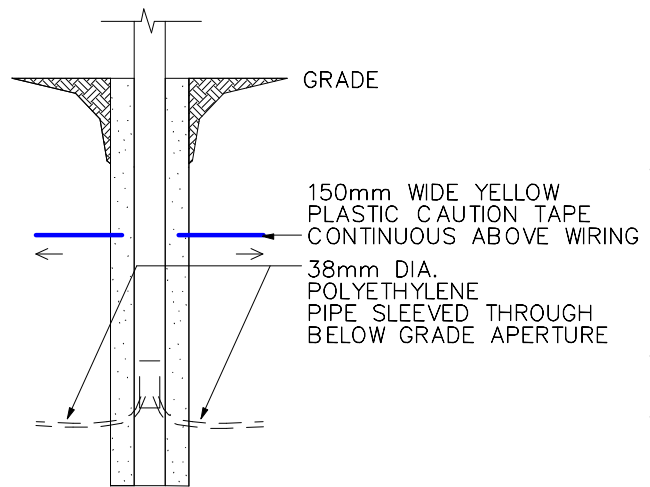

SECTION B - B LIGHT POLE

NOTES:

1. REFER TO ASPHALT PEDESTRIAN PATHWAY DETAIL NO. 02510-1 FOR PATHWAY DETAIL. THE COMMUNITY SERVICES - SUBDIVISION REQUIREMENTS MANUAL CONTAINS THE ASSOCIATED ELECTRICAL DETAILS AND STANDARDS.
2. TRENCH TO BE SET BACK 1000mm FROM PATHWAY EDGE.
3. LIGHT POLE TO BE SET BACK 600mm FROM PATHWAY EDGE.
4. POWER PEDESTAL TO BE SET BACK 2000mm FROM PATHWAY EDGE AND 2000mm FROM PROPERTY LINE.
5. POLE SPACING IS TO BE DETERMINED BY A CERTIFIED ELECTRICAL ENGINEER.
6. ELECTRICAL CONNECTION TO BE MADE IN HANDWELL BY ENERSOURCE AFTER E.S.A. APPROVAL.
7. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
8. ARRANGE INSPECTIONS OF WORK PER SPECIFICATION.

NO.	REVISION	DATE
-----	----------	------

- | | | |
|----|------------------------------------|--|
| 1. | MAR29/04 - HANDWELL & CAUTION TAPE | |
|----|------------------------------------|--|



SCALE: N.T.S.
 DATE: March 29, 2004
 DRAWN BY: P & D
 NUMBER: 16530-3