


# 02510-8

## Paving Asphalt Parking Lot

**NOTE:**  
TO BE USED AS A GUIDELINE ONLY.  
NOT TO SCALE. REMOVE CITY TITLE BLOCK  
AND REDRAW TO REPRESENT SITE SPECIFIC  
CONDITIONS. ALL SITE SPECIFIC CONDITIONS  
ARE TO BE CONFIRMED BY THE PROJECT  
CONSULTANT.

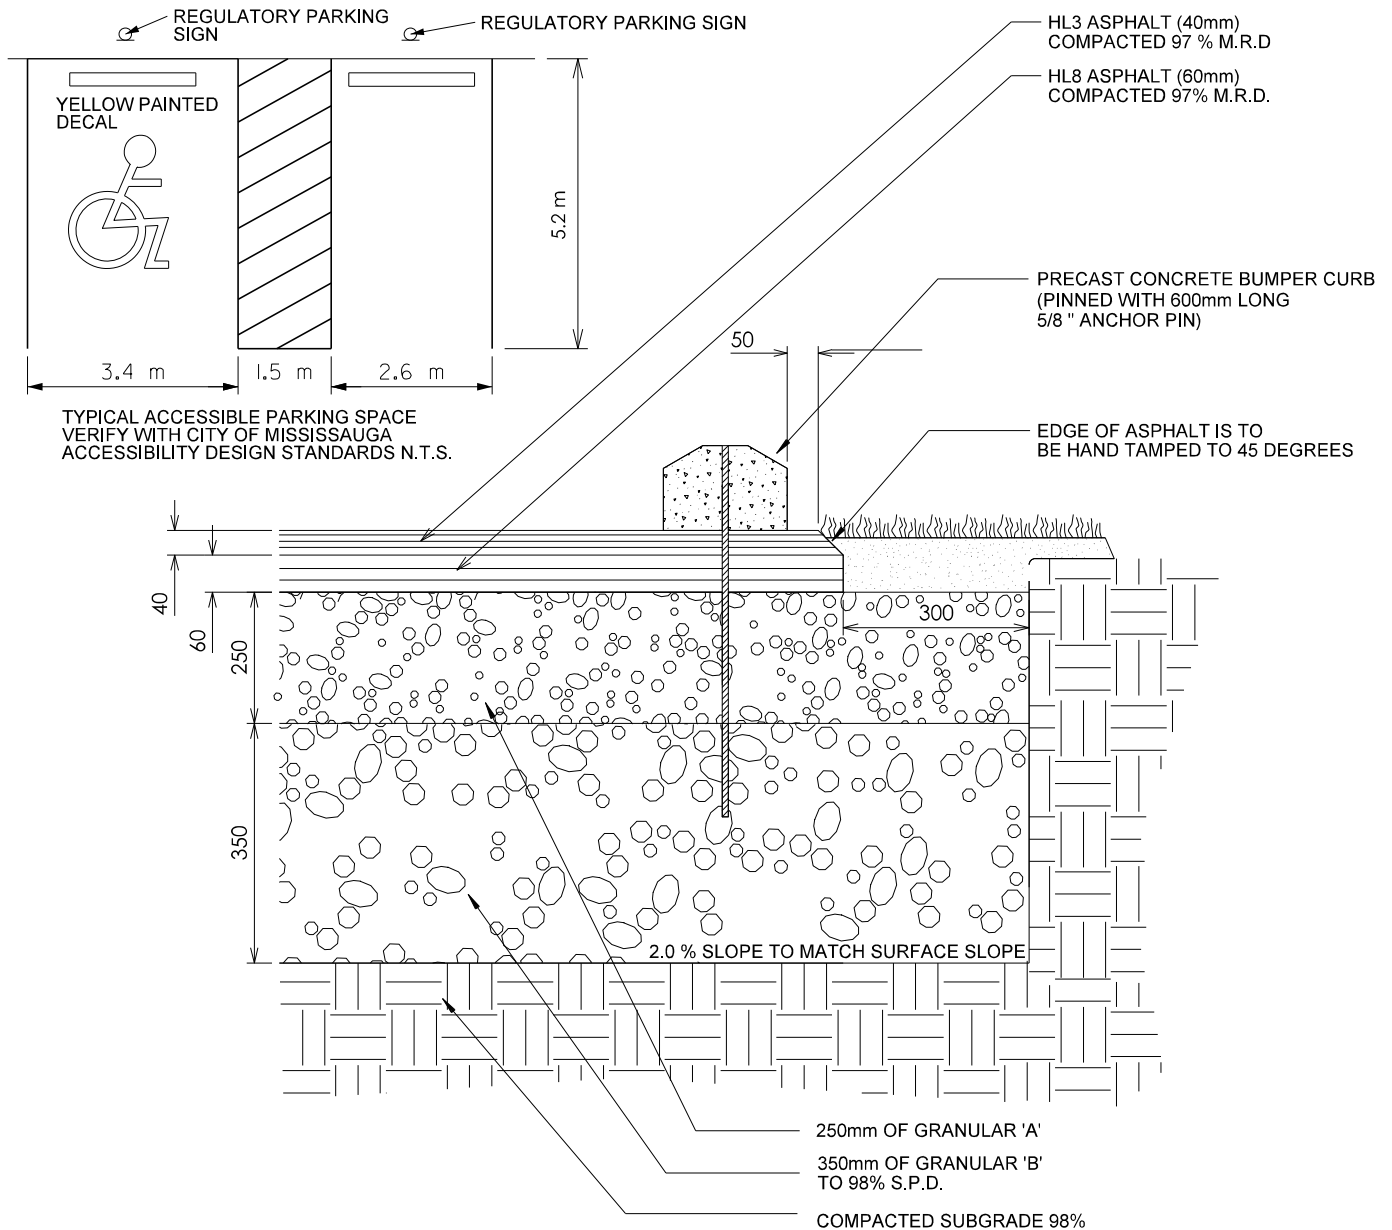

### NOTES:

1. 1.5m WIDE ACCESSIBLE ACCESS TO BE LOCATED PROXIMATE TO ACCESSIBLE PARKING AND PATHWAY CONNECTION AS PER DRAWINGS.
2. SUBGRADE TO BE SLOPED AT 2% MIN TO FACILITATE DRAINAGE AND TO BE APPROVED BY COMMUNITY SERVICES PRIOR TO INSTALLATION OF GRANULAR BASE - DEPTH DEPENDANT ON GEOTECHNICAL REVIEW
3. GRANULAR BASE 'A' TO BE SLOPED AT 2%
4. ALL GRANULAR MATERIAL TO BE COMPACTED TO 98% S.P.D.
5. SUBGRADE TO BE COMPACTED TO 98% S.P.D.
6. COMPACTION TESTS ARE TO BE SUBMITTED TO COMMUNITY SERVICES
7. ASPHALT SURFACE TO BE SMOOTH AND EVEN THROUGHOUT
8. ALL DIMENSIONS ARE IN MILLIMETERS
9. PARKING STALL LINES (WHITE) AND ACCESSIBLE PARKING SYMBOL (YELLOW) TO BE 100mm WIDE USING REGULAR DRY TRAFFIC PAINT.
10. ACCESSIBLE SPACE TO BE DESIGNATED BY SIGN (BY-LAW 10-16)