


# 02510-3

## Paving Asphalt Parking Lot CIP Concrete Curb

**NOTE:**  
TO BE USED AS A GUIDELINE ONLY.  
NOT TO SCALE. REMOVE CITY TITLE BLOCK  
AND REDRAW TO REPRESENT SITE SPECIFIC  
CONDITIONS. ALL SITE SPECIFIC CONDITIONS  
ARE TO BE CONFIRMED BY THE PROJECT  
CONSULTANT.

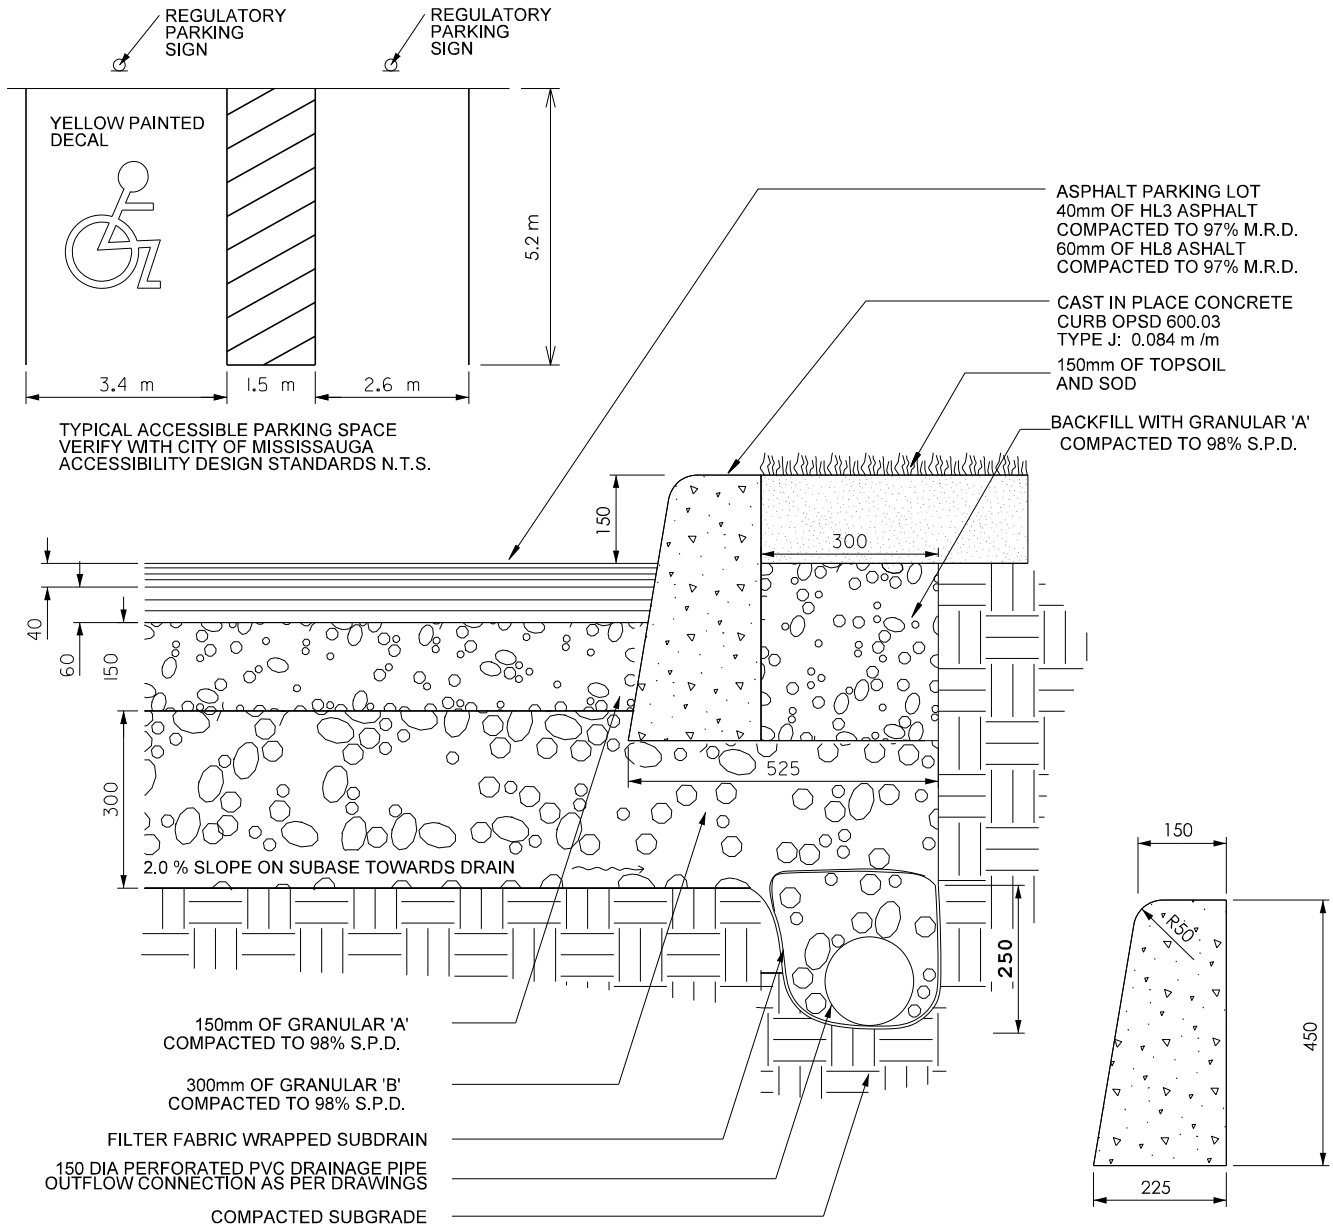

**NOTES:**

1. 1.5m WIDE ACCESSIBLE CURB RAMP/CURB DEPRESSION TO BE LOCATED PROXIMATE TO ACCESSIBLE PARKING SPACES PER COMMUNITY SERVICES' REPRESENTATIVE'S DIRECTION.
2. SUBGRADE TO BE SLOPED AT 2% MIN TO FACILITATE DRAINAGE AND TO BE APPROVED PRIOR BY COMMUNITY SERVICES PRIOR TO APPLICATION OF GRANULAR BASE
3. GRANULAR BASE 'A' TO BE SLOPED AT 2% AND SUBJECT TO APPROVAL BY COMMUNITY SERVICES
4. ALL GRANULAR MATERIAL TO BE COMPACTED TO 98% S.P.D.
5. SUBGRADE TO BE COMPACTED TO 98% S.P.D.
6. COMPACTION TESTS ARE TO BE SUBMITTED TO COMMUNITY SERVICES PRIOR TO ACCEPTANCE
7. ASPHALT SURFACE TO BE SMOOTH AND EVEN THROUGHOUT
8. ALL DIMENSIONS ARE IN MILLIMETERS
9. PARKING STALL LINES (WHITE) AND ACCESSIBLE PARKING SYMBOL (YELLOW) TO BE 100mm WIDE USING REGULAR DRY TRAFFIC PAINT.
10. ACCESSIBLE SPACE TO BE DESIGNATED BY SIGN (BY-LAW 10-16)