

SCALE : N.T.S DATE : June 2017

| 1 | Little Leaf Linden | Tilia cordata | 34 | F/G | Vines growing on tree | 0 | Retain |
|-----|-----------------------------|--------------------|-----|-----|---|---|--------|
| 2 | Little Leaf Linden | Tilia cordata | 33 | F/G | | 0 | Retain |
| 3 | Little Leaf Linden | Tilia cordata | 25 | F/G | | 0 | Retain |
| 4 | Little Leaf Linden | Tilia cordata | 24 | F/G | | 0 | Retain |
| 5 | Little Leaf Linden | Tilia cordata | 27 | F/G | | 0 | Retain |
| 6 | Little Leaf Linden | Tilia cordata | 28 | F/G | | 0 | Retain |
| 168 | Manitoba Maple | Acer negundo | 36 | F | 4 stem, tree showing signs of urban stress | 1 | Remove |
| 169 | Manitoba Maple | Acer negundo | 35 | F | 3 stem, signs of rot in trunk, signs of urban stress | 1 | Remove |
| 170 | Manitoba Maple | Acer negundo | 35 | F/P | Significant canopy dieback | 1 | Remove |
| 171 | Manitoba Maple | Acer negundo | 11 | F/G | | 1 | Remove |
| 172 | Manitoba Maple | Acer negundo | 60 | F | | 2 | Remove |
| 173 | Manitoba Maple | Acer negundo | 11 | F | 2 stem | 1 | Remove |
| 174 | Manitoba Maple | Acer negundo | 15 | F | 2 stem | 1 | Remove |
| 175 | Manitoba Maple | Acer negundo | 120 | F | Signs of rot, tupical developing structural issues for aging tree | 2 | Remove |
| 176 | Grey Birch | Betula populifolia | 35 | Р | | 0 | Remove |
| 177 | Manitoba Maple | Acer negundo | 27 | F | | 1 | Remove |
| 178 | Flowering Crabapple Tree | Malus | 31 | F/P | | 1 | Remove |
| 179 | Manitoba Maple | Acer negundo | 19 | F | | 1 | Remove |
| 180 | Manitoba Maple | Acer negundo | 17 | F | | 1 | Remove |
| 181 | Manitoba Maple | Acer negundo | 28 | F | 3 stem | 1 | Remove |
| 182 | Manitoba Maple | Acer negundo | 30 | F | | 1 | Remove |
| 183 | Manitoba Maple | Acer negundo | 27 | F | 3 stem | 1 | Remove |
| 184 | Manitoba Maple | Acer negundo | 22 | F | 3 stem | 1 | Remove |
| 185 | Manitoba Maple | Acer negundo | 28 | P/D | 95%dead, fruiting bodies present | 0 | Remove |
| 186 | Manitoba Maple | Acer negundo | 33 | F/P | 4 stem, signs fo rot in trunk | 0 | Retain |
| 187 | Manitoba Maple | Acer negundo | 35 | Р | Past failures, trunk rot, significant deadwood | 0 | Retain |
| 188 | Manitoba Maple | Acer negundo | 39 | Р | Significant lean, trunk rot | 0 | Remove |
| 189 | Manitoba Maple | Acer negundo | 17 | F | 2 stem, significant lean | 1 | Remove |
| 190 | Manitoba Maple | Acer negundo | 11 | F | 2 stem, moderate lean | 1 | Remove |
| 191 | Manitoba Maple | Acer negundo | 13 | F | 2 stem, moderate lean | 1 | Remove |
| 192 | Manitoba Maple | Acer negundo | 13 | F | 4 stem | 1 | Remove |
| 193 | Manitoba Maple | Acer negundo | 14 | F | 2 stem | 1 | Remove |
| 194 | Manitoba Maple | Acer negundo | 10 | F | | 1 | Remove |
| 195 | Manitoba Maple | Acer negundo | 10 | F | 7 stem | 1 | Remove |
| 196 | Manitoha Manle | Acer negundo | 10 | F | | 1 | Remove |

2 stem

3 stem

Acer negundo

Acer negundo


Acer negundo

Manitoba Maple


Manitoba Maple

Manitoba Maple Acer negundo

NEIGHBOUR'S CONSENT WILL BE REQUIRED PRIOR TO THE REMOVAL OF TREE 171.

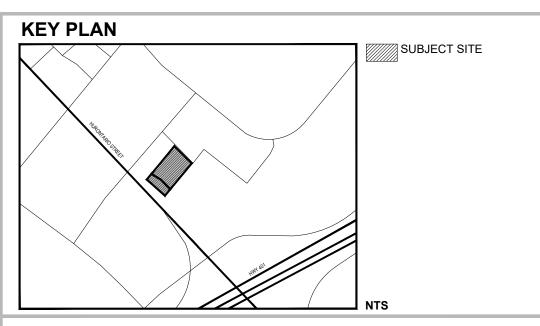

LEGEND






EXISTING DECIDUOUS TREE TO BE REMOVED

TREE PROTECTION SOLID HOARDING (Private Lands) PER

CITY OF MISSISSAUGA STANDARDS THE FINAL LOCATION OF THE EXTENT OF PROPOSED TREE PROTECTION FENCING WILL BE CO-ORDINATED WITH THE ENGINEER AND ARBORIST TO ENSURE THAT DAMAGE TO EXISTING TREES IS MINIMIZED DURING CONSTRUCTION.

—-—- PROPERTY LINE



TREE IDENTIFICATION KEY (TREES TO BE RETAINED)




TREE IDENTIFICATION KEY (TREES TO BE REMOVED)

GENERAL NOTES

- 1. Do not scale the drawings. All dimensions are in millimetres unless noted otherwise.
- 2. This drawing is to be read in conjunction with the project site plan. landscape plan, and engineering plan.
- 3. The tree inventory includes assessment of trees >10cm DBH. The trees have been assessed based on species, size and condition.
- 4. The contractor shall check and verify all existing and proposed grading and conditions on the project and immediately report any discrepancies to the consultant before proceeding with any removals.
- 5. The contractor is to be aware of all existing and proposed services and utilities. The contractor is responsible for having all underground services and utility lines staked by each agency having jurisdiction prior to commencing work.
- 6. This drawing is to be used for development approval only.
- 7. Do not leave any holes open overnight.
- 8. Keep area outside construction zone clean and useable by others at all times. Contractor
- shall throughly clean areas surrounding the construction zone at the end of each work day. 9. Contractor to make good any and all damages outside of the development area that may
- occur as a result of tree removals at no extra cost. 10. This drawing is Copyright MHBC Planning, 2020.

| 5. | NOVEMBER 4, 2022 | RE-ISSUED FOR SPA | МВ |
|--------------|---------------------------|-------------------|----|
| 4. | NOVEMBER 20, 2020 | ISSUED FOR SPA | тт |
| 3. | NOVEMBER 13, 2020 | ISSUED FOR REVIEW | НН |
| 2. | OCTOBER 14, 2020 | ISSUED FOR REVIEW | нн |
| 1. | SEPTEMBER 11, 2020 | ISSUED FOR REVIEW | нн |
| REVISION NO. | DATE | ISSUED / REVISION | ВҮ |



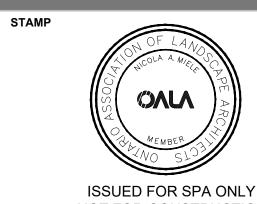

PLAN SCALE 1:300 FILE NO. 16257AG

DRAWN BY

NOT FOR CONSTRUCTION All drawings and specifications are instruments of service and will remain the property of MHBC Planning and must be returned at the completion of the work. This drawing shall not be used for construction purposes unless the drawings are marked 'Issued for Construction' and the professional seal is signed and dated by the landscape architect.

CHECKED BY N.M.

AUGUST 2020

H.H.

6333 HURONTARIO STREET

MISSISSAUGA, ONTARIO

FILE NAME

PROJECT

TREE INVENTORY, PROTECTION, AND **REMOVALS**

DWG NO. TI-1

TREE PRESERVATION HOARDING - (SOLID HOARDING) TI-1 CITY OF MISSISSAUGA STANDARD