



02950-1


Planting Tree Deciduous

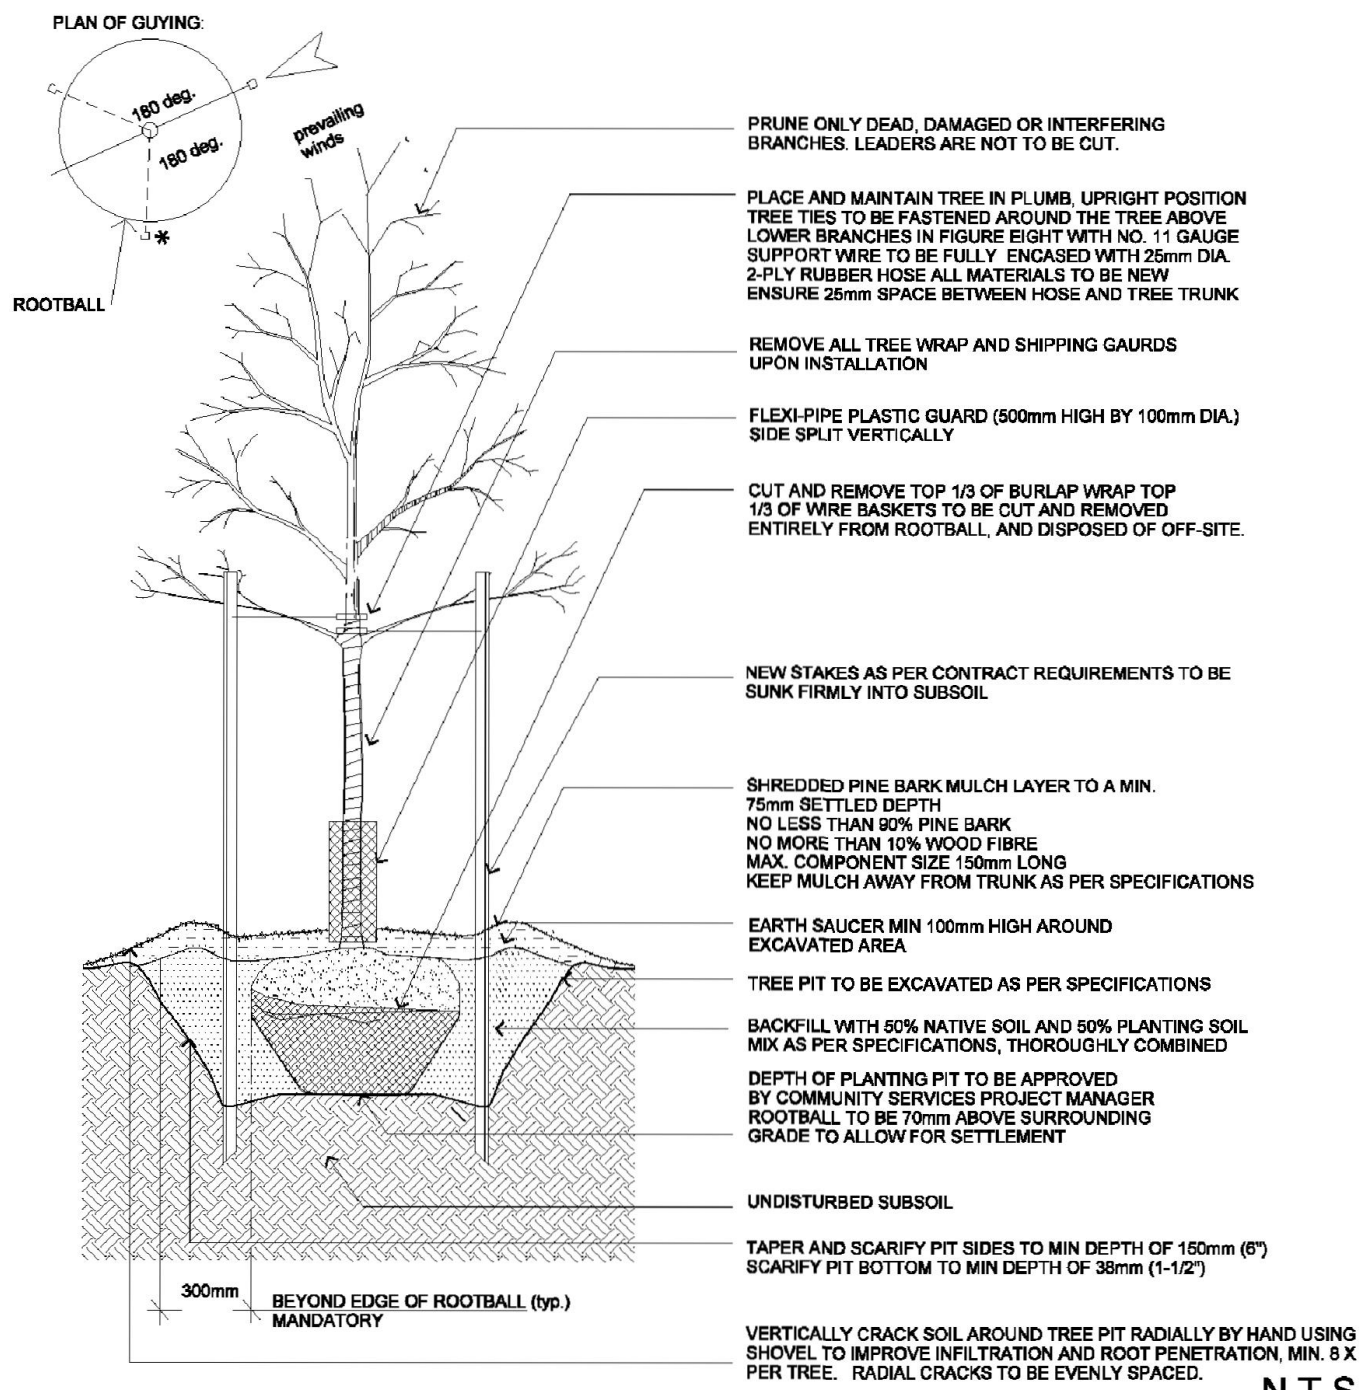


1 Deciduous Tree (Per City Detail 02950-1)
L-2 NTS

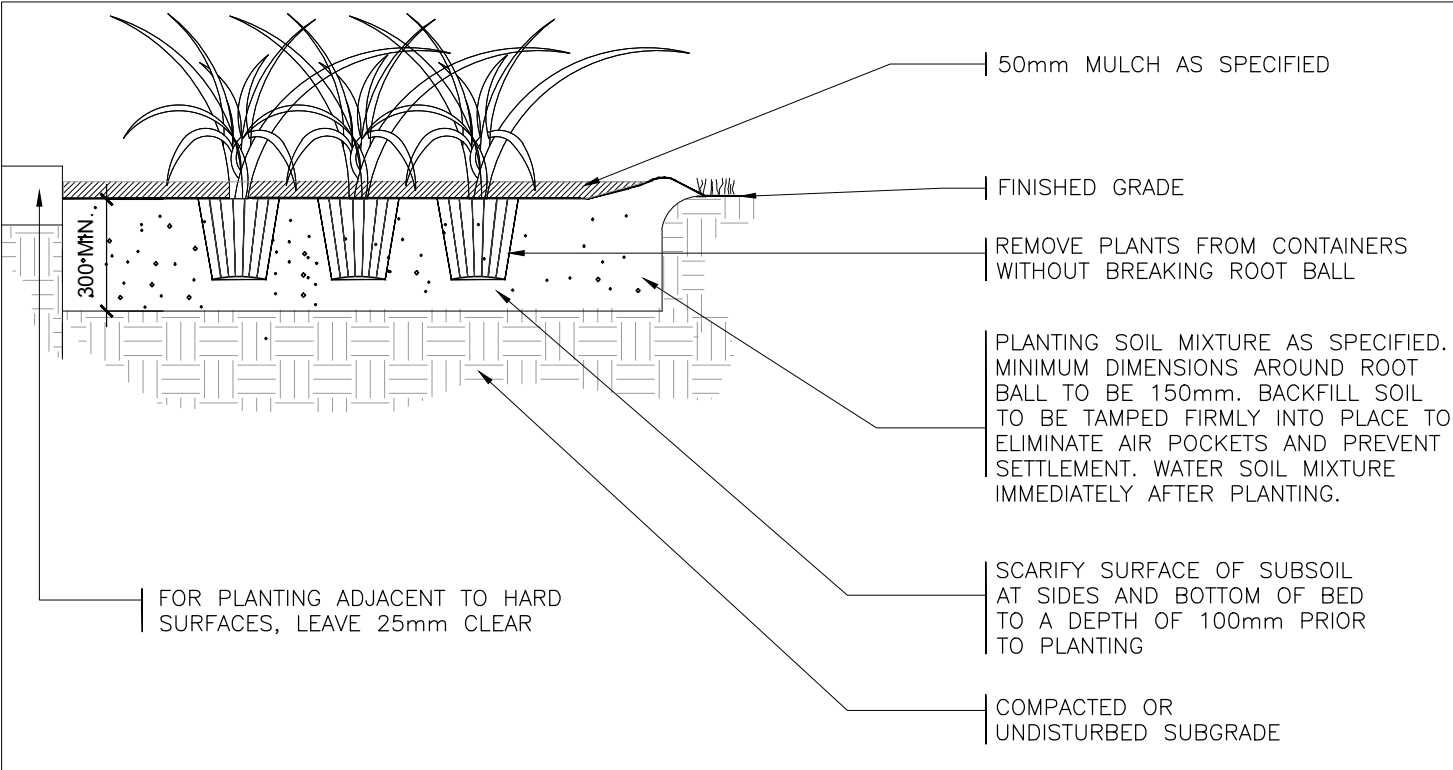

4 Perennial Planting
L-2 1:20

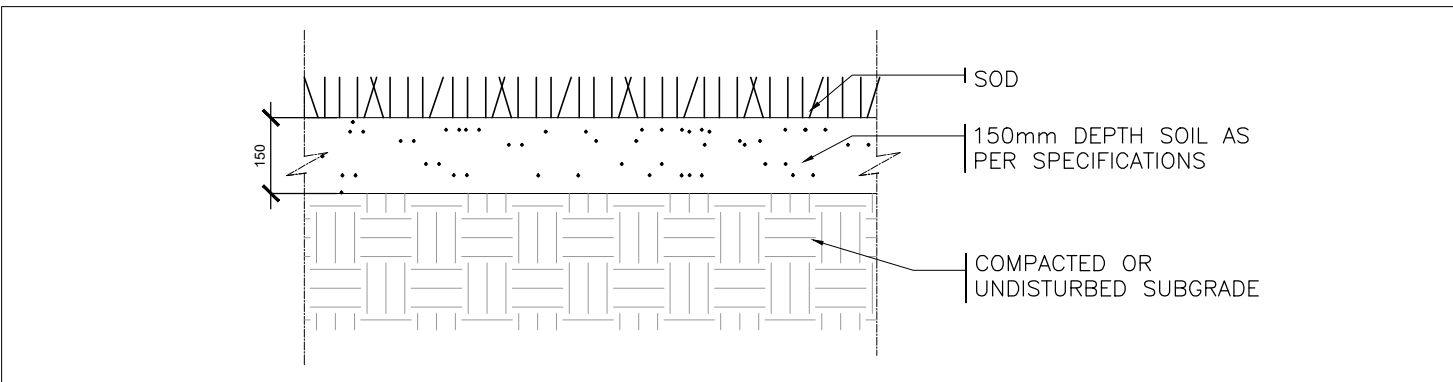


5 Sod
L-2 1:15

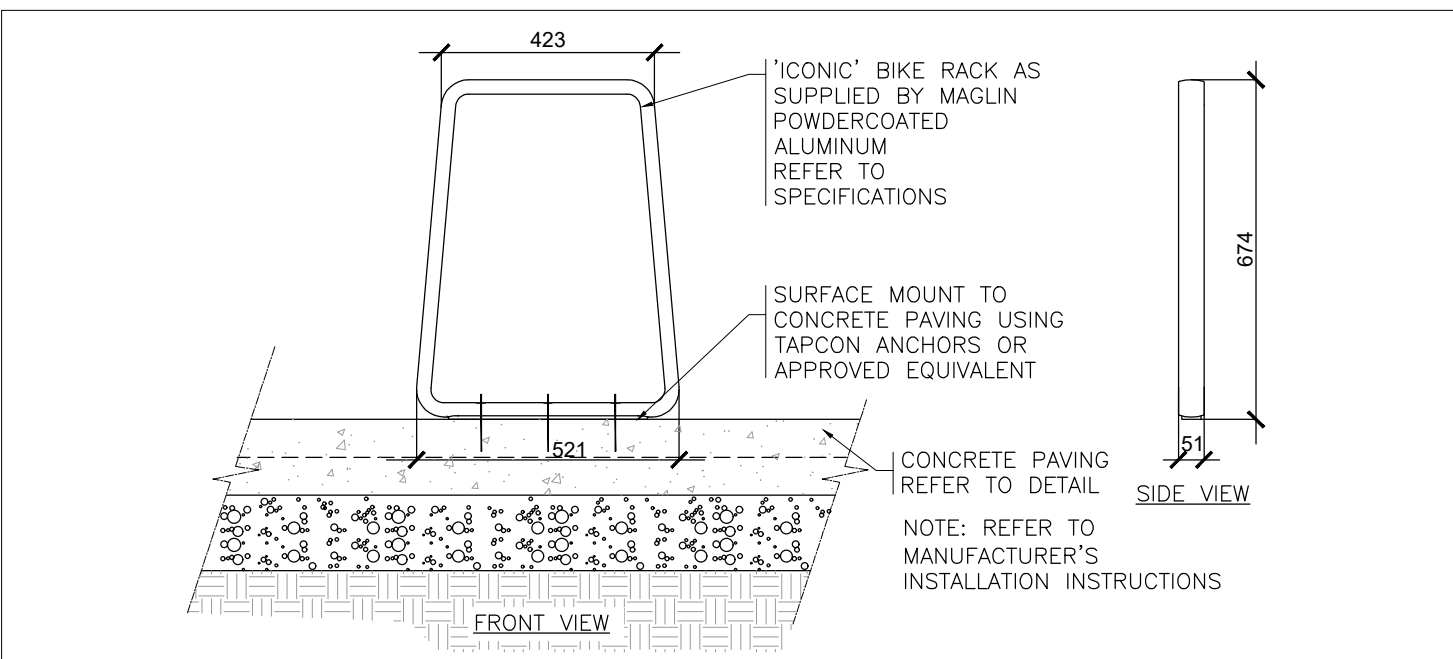


6 Bicycle Rack
L-2 1:15

02950-2

Planting Tree Coniferous

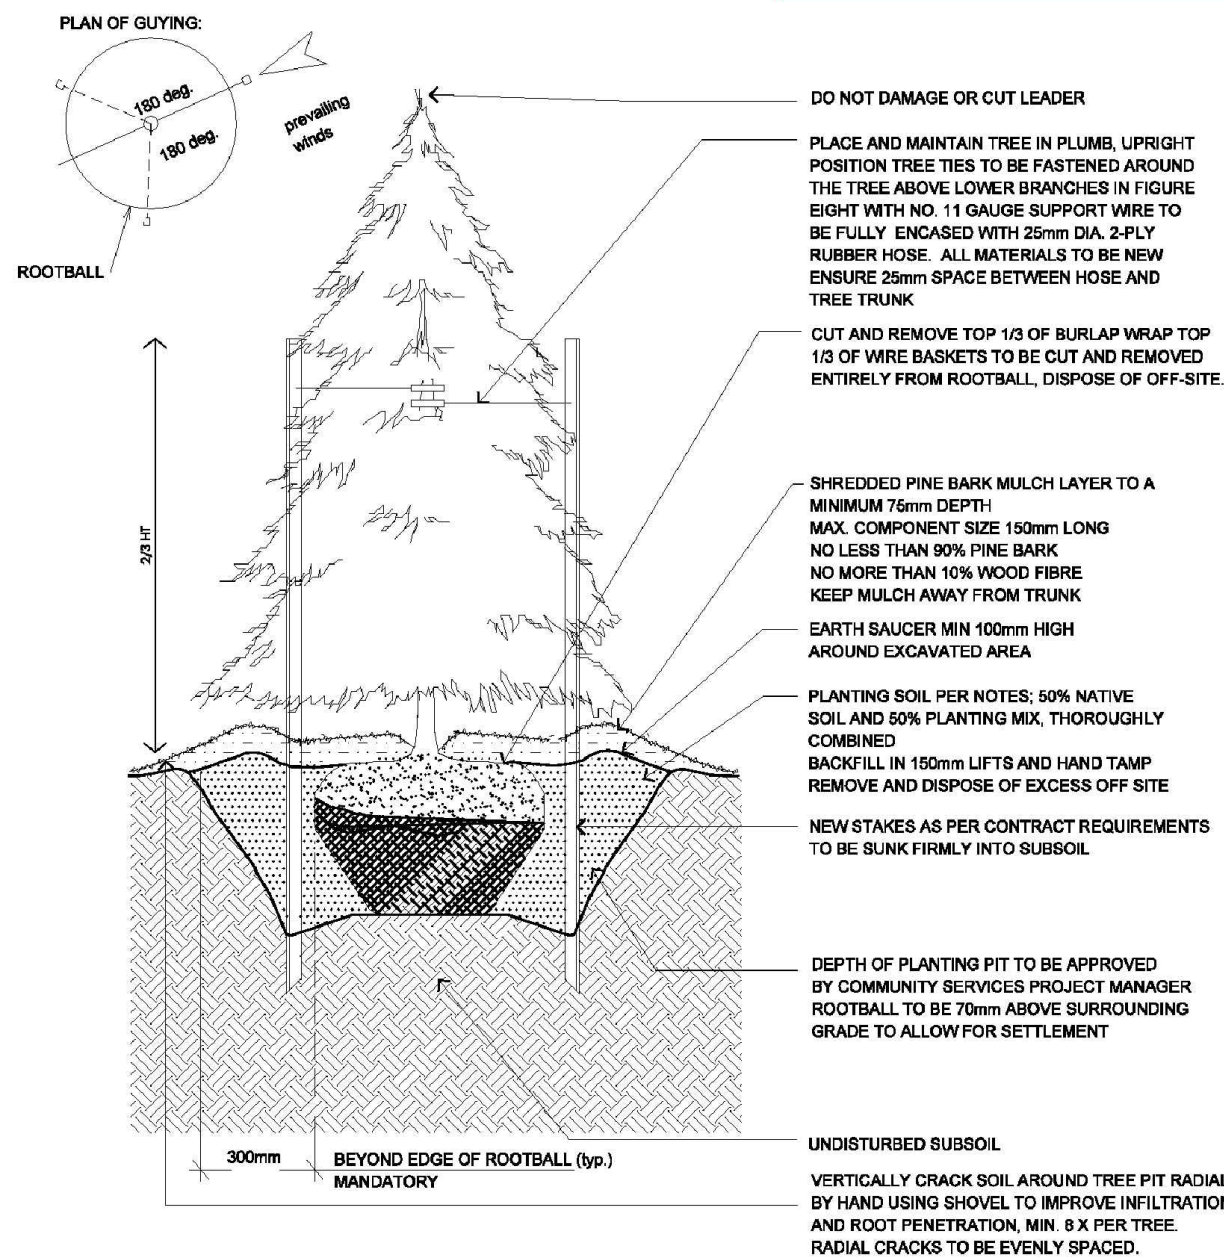

2 Coniferous Tree (Per City Detail 02950-2)
L-2 NTS

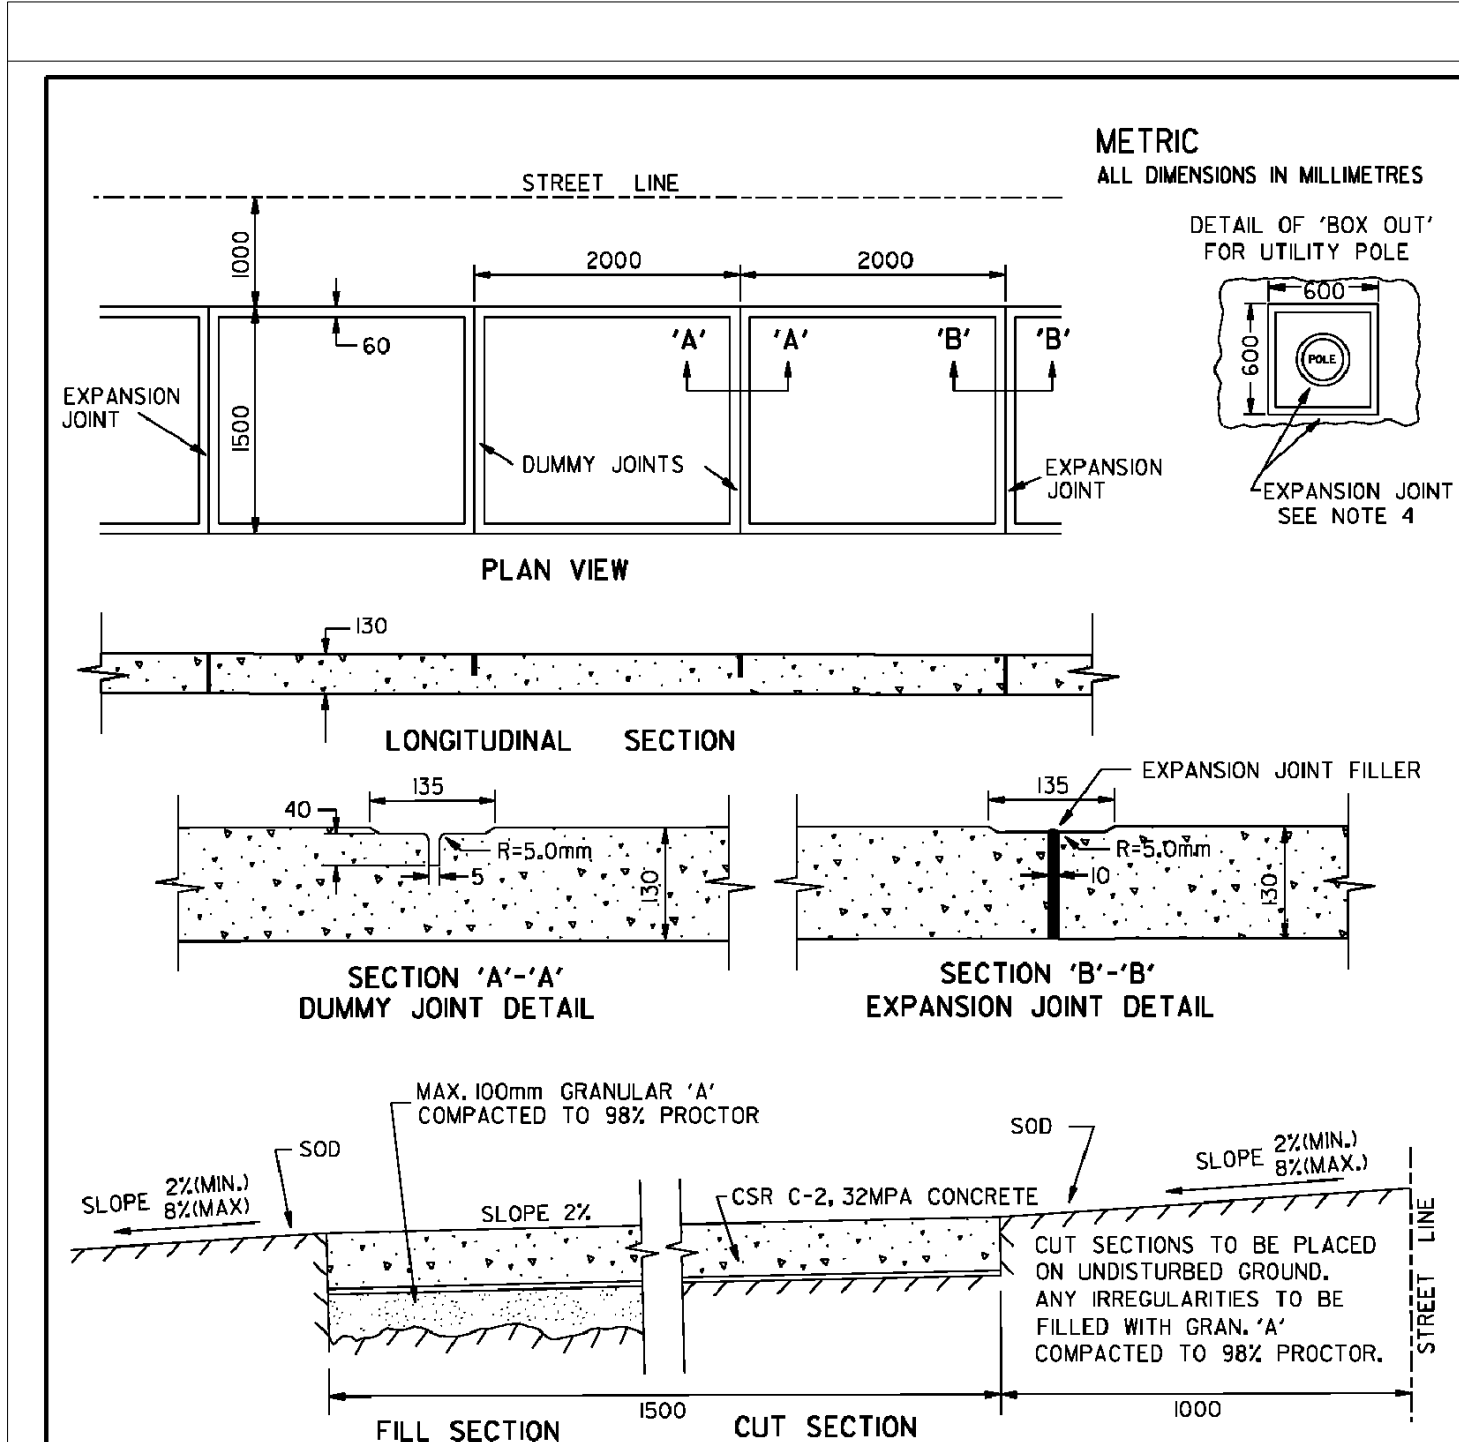

NOTES:

1. DEPTH OF SIDEWALK TO BE 180mm AT COMMERCIAL OR INDUSTRIAL DRIVEWAYS.
2. EXPANSION JOINTS ARE REQUIRED IN SIDEWALK AT 6000mm INTERVALS AND:
a) BETWEEN SIDEWALK AND ABUTTING CURB
b) ADJACENT TO EXISTING STRUCTURES (WALKS, CURBS, UTILITY POLES, HYDRANTS, MANHOLES, ETC.) OR AT THE DISCRETION OF THE COMMISSIONER OF TRANSPORTATION AND WORKS.
3. DUMMY JOINTS SHALL HAVE STANDARD SPACING OF 2000mm AND WILL BE FORMED AFTER THE CONCRETE HAS RECEIVED ITS INITIAL SET.
4. WHEN SIDEWALKS ARE ADJACENT TO CURBS, EXPANSION JOINTS SHALL COINCIDE WITH THE CURB EXPANSION JOINTS.
5. FILL SECTIONS REQUIRING GREATER THAN 100mm TO BE FILLED WITH NATIVE MATERIAL COMPACTED TO 98% PROCTOR.




STANDARD CONCRETE SIDEWALK

EFF. DATE	2015-03-27	SCALE	N.T.S.
REV.	4	2015-03-27	STANDARD No. 2240.010


7 Standard Concrete Paving
L-2 NTS

02950-6

Planting Shrub

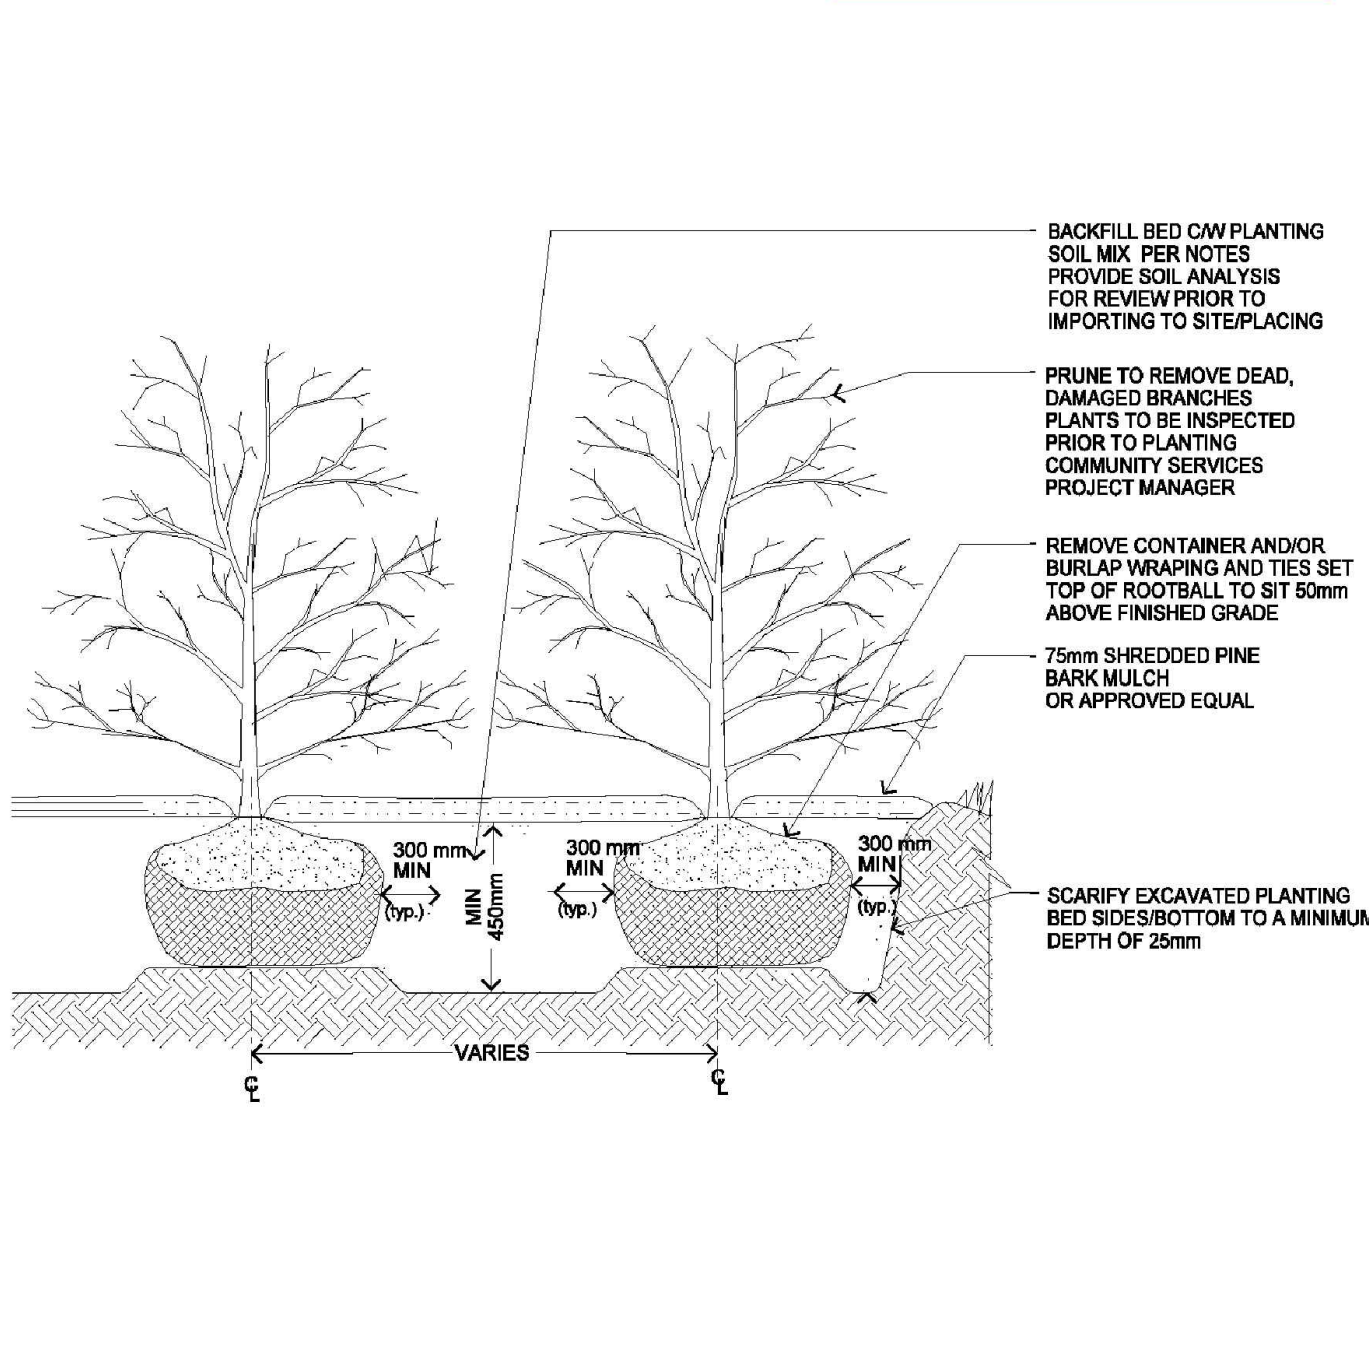

3 Shrub Planting (Per City Detail 02950-6)
L-2 NTS

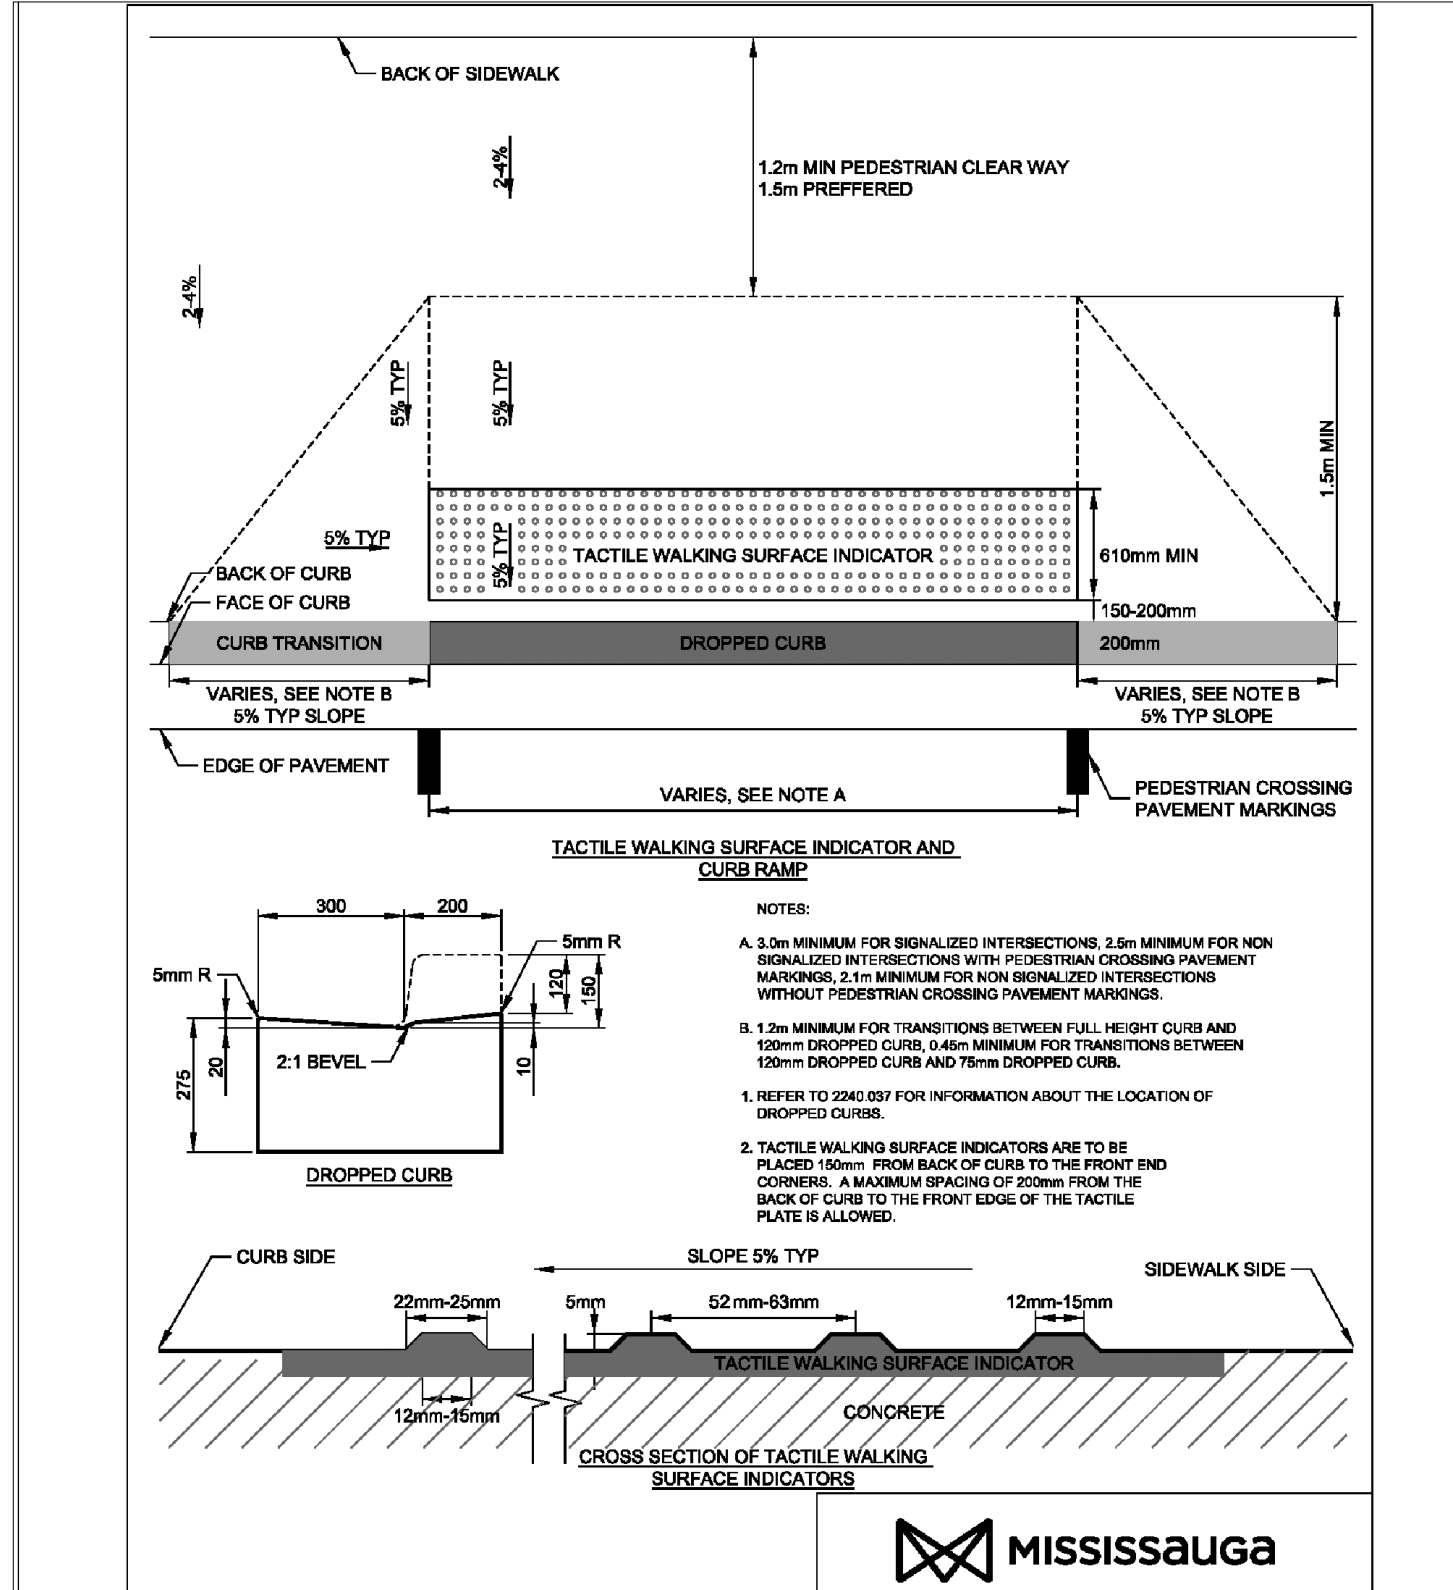

8 Curb Ramp
L-2 NTS

Legend

General Notes

1. Do not scale the drawings. All dimensions are in millimetres unless noted otherwise.
2. This drawing is to be read in conjunction with the survey prepared by the project architect and project engineer.
3. The contractor shall check and verify all existing and proposed grading and conditions on the project and immediately report any discrepancies to the consultant before proceeding with any work.
4. The contractor is to be aware of all existing and proposed services and utilities. The contractor is responsible for having all underground services and utility lines staked by each agency having jurisdiction prior to commencing work.
5. Final location of the street trees to be determined on site by the Landscape Architect based on final locations of utilities. All boulevard deciduous trees shall have rodent protection collars installed at initial planting.
6. This drawing is to be used for development approval only. For layout of all work refer to construction drawings.
7. Do not leave any holes open overnight.
8. Keep area outside construction zone clean and useable by others at all times. Contractor shall thoroughly clean areas surrounding the construction zone at the end of each work day.
9. Contractor to make good any and all damages outside of the development area that may occur as a result of construction at no extra cost.
10. This drawing is Copyright MHBC Planning, 2020.

1	December 3, 2021	Re-issued for OPA	TT
1	December 1, 2020	Issued for SPA	TT

Revision No. Date Issued / Revision By

230-7050 WESTON ROAD
WOODBRIIDGE, ON. L4L 8G7
P: 905.761.5588 F: 905.761.5589
WWW.MHBCPLAN.COM

PLANNING
URBAN DESIGN
& LANDSCAPE
ARCHITECTURE
MHBC PLANNING

Stamp Date September 2020

Drawn By	TT
Plan Scale	AS SHOWN
File No.	16257 N
Checked By	PD
Other	

Project

3855 Dundas St. E.
MISSISSAUGA, ON

File Name Dwg No.

LANDSCAPE DETAILS L-2