



NOTES:
 1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED.
 2. THIS DETAIL IS TO BE USED IN CONJUNCTION WITH THE APPROVED LAYOUT DRAWING

1 MULTI-USE ASPHALT PATH
 L-202 SCALE NTS

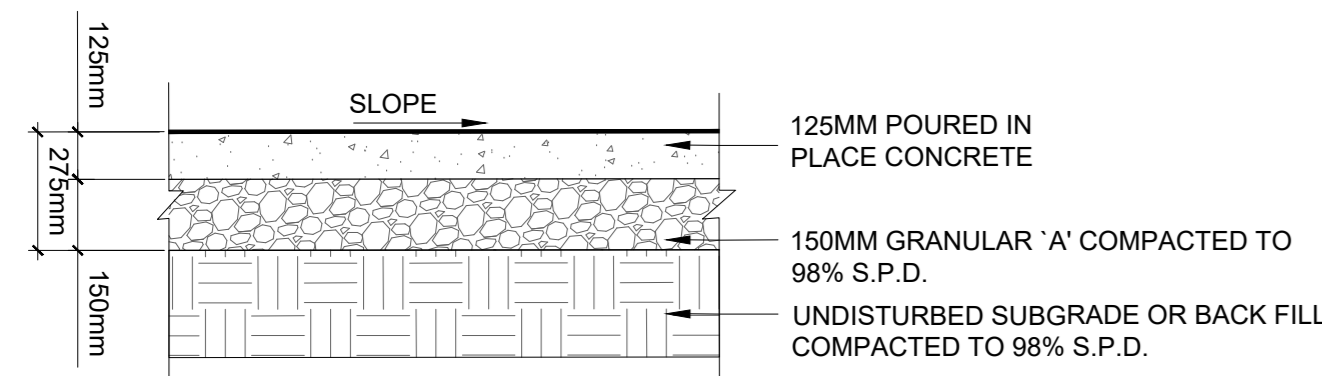


NOTES:
 1. CONCRETE TO BE 32MPa, CLASS C-2 AT 28 DAYS WITH 5-8% AIR ENTRAINMENT.
 2. CONCRETE TO HAVE BROOM FINISH PERPENDICULAR TO THE PRIMARY DIRECTION OF TRAVEL.
 3. EXPANSION JOINTS TO BE LOCATED AT EVERY 6M AND WHERE CONCRETE PAVING ABUTS OTHER STRUCTURES OR BUILDINGS.
 4. CONTROL JOINTS TO BE LOCATED AT MINIMUM INTERVALS OF 3M UNLESS IDENTIFIED OTHERWISE (I.E. AT BUILDING ENTRANCE).
 5. CONCRETE TO BE SPRAYED WITH WHITE PIGMENT CURING COMPOUND.
 6. NO TOOLED EDGES.

2 TYP. PEDESTRIAN CONCRETE WALKWAY
 L-202 SCALE NTS

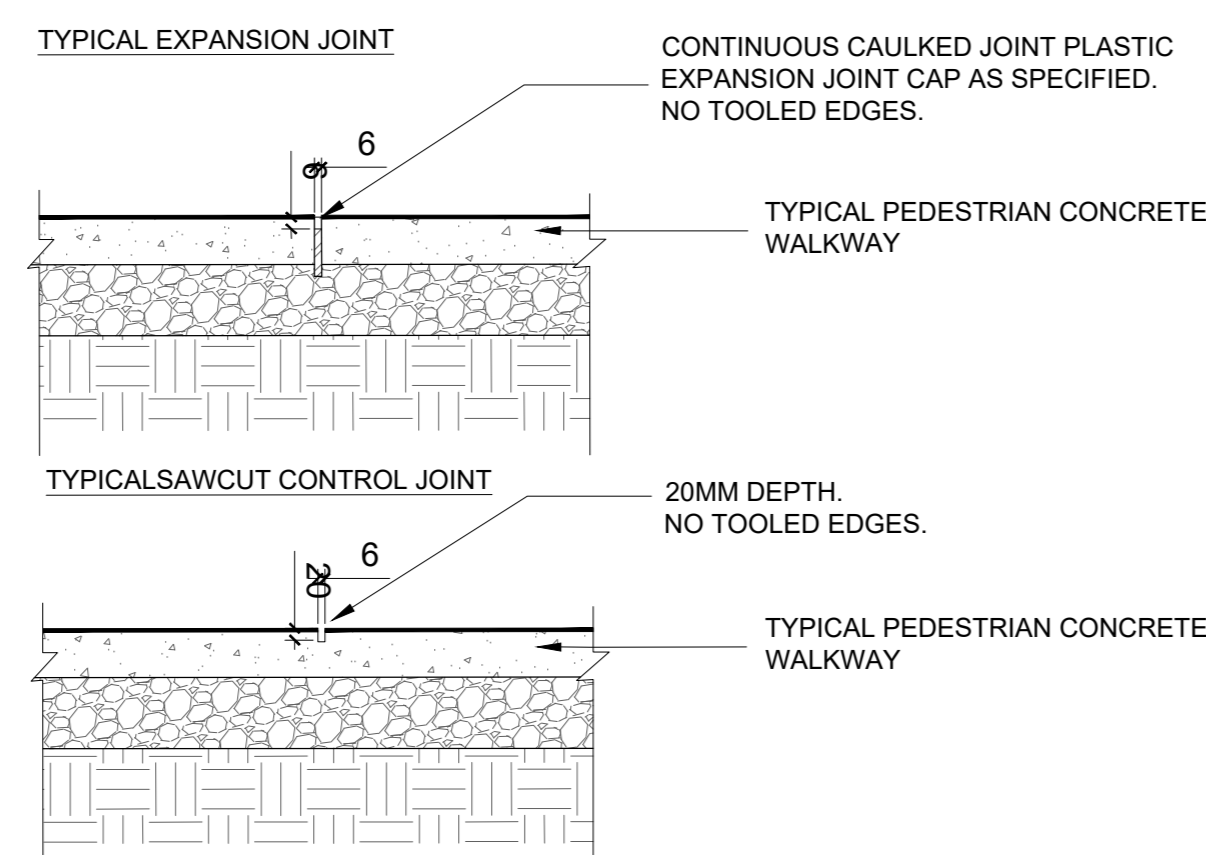


NOTES:
 1. TOP OF JOINT CAP TO BE FLUSH WITH TOP OF PAVEMENT. REMOVE TOP OF CAP BEFORE CAULKING.
 2. FINISH ALL EXPOSED EXPANSION JOINTS WITH CONTINUOUS CAULK ON TOP.
 3. BITUMINOUS FIBRE EXPANSION JOINT TO BE MAX. 15MM WIDTH.
 4. EXPANSION JOINTS TO BE LOCATED AT EVERY 6M AND WHERE CONCRETE PAVING ABUTS OTHER STRUCTURES OR BUILDINGS.
 5. CONTROL JOINTS TO BE LOCATED AT MINIMUM INTERVALS OF 3M.
 6. NO TOOLED EDGES.

3 TYP. PEDESTRIAN CONCRETE EXPANSION AND CONTROL JOINTS
 L-202 SCALE NTS

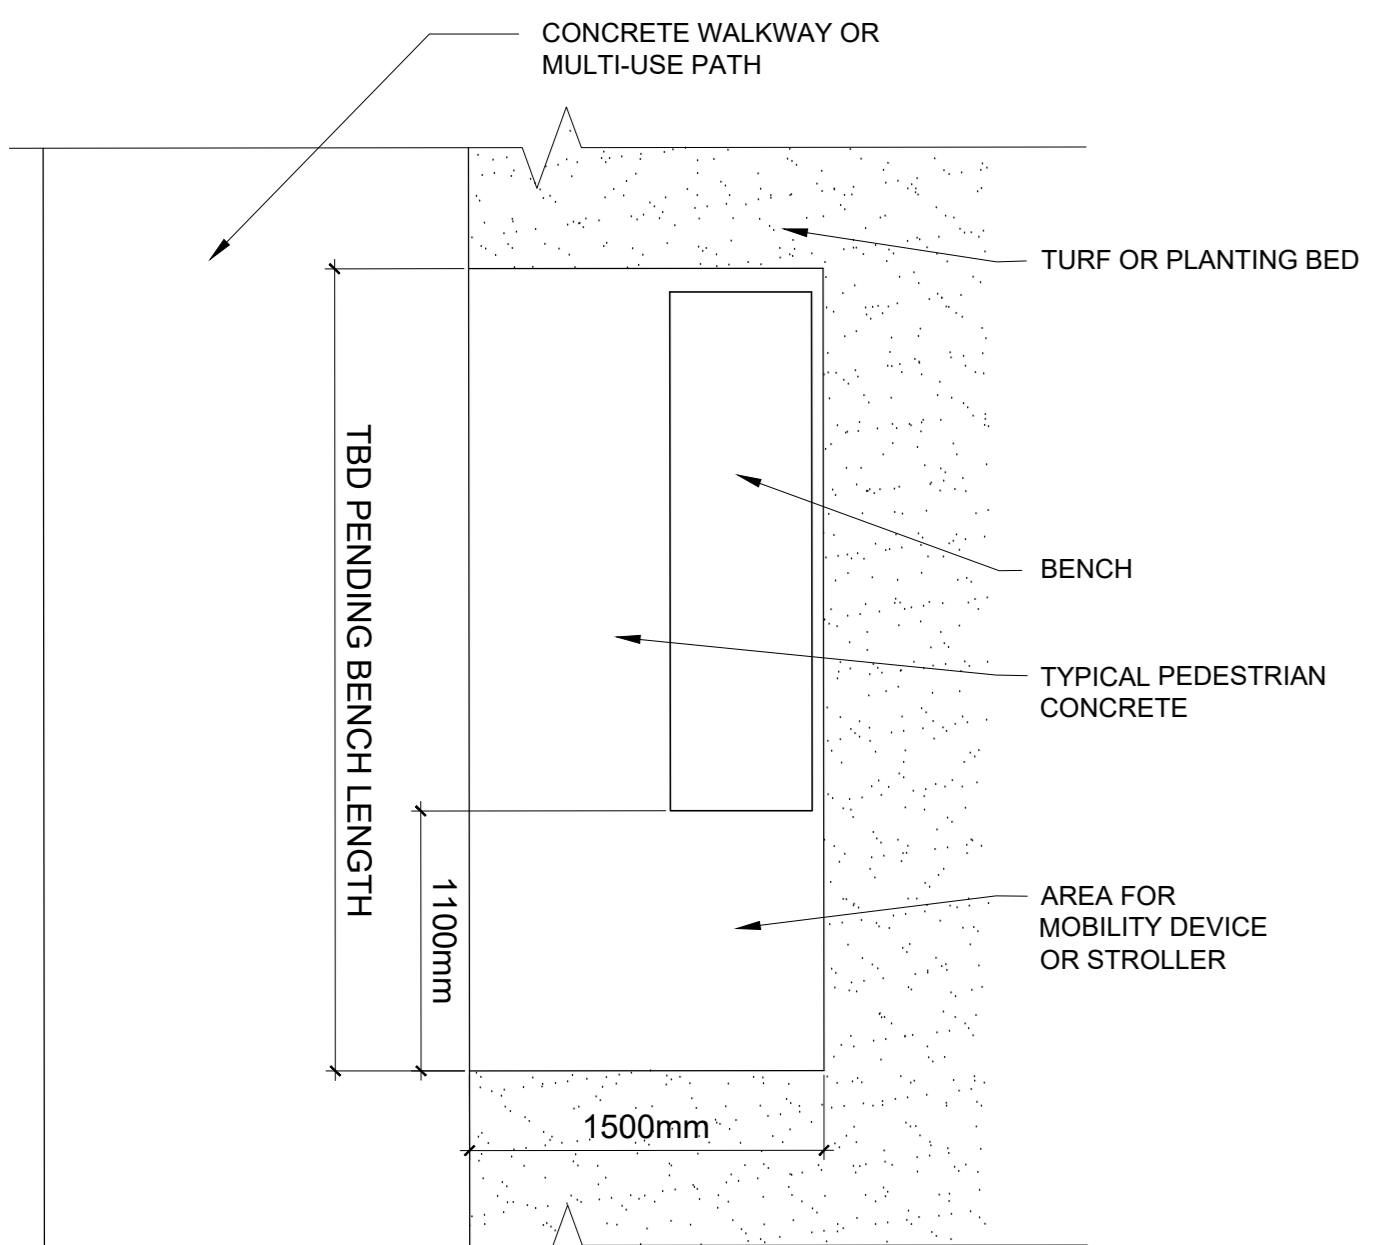

4 TYP. REST AREA WITH CONCRETE PAD AND BENCH
 L-202 SCALE NTS

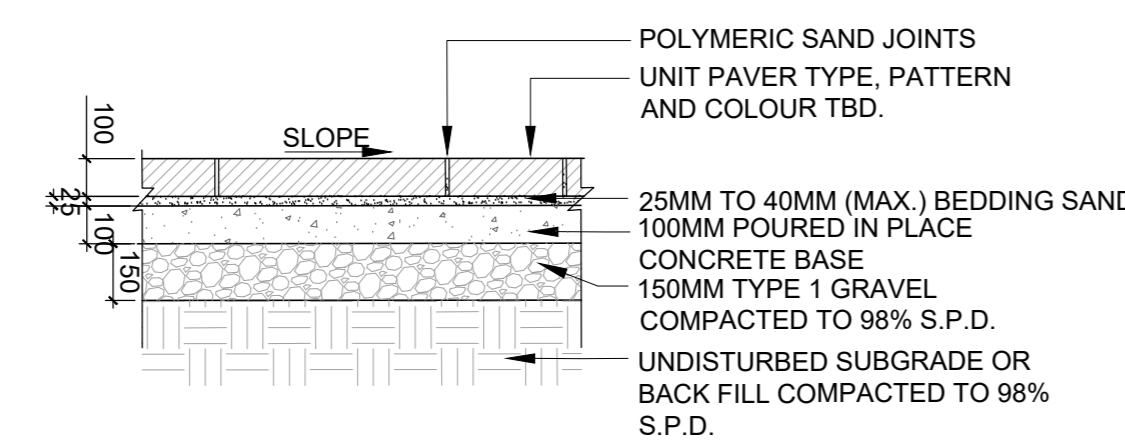

NOTES:
 1. CONCRETE TO BE 32MPa, CLASS C-2 AT 28 DAYS WITH 5-8% AIR ENTRAINMENT.
 2. EXPANSION JOINTS TO BE LOCATED AT EVERY 6M AND WHERE CONCRETE PAVING ABUTS OTHER STRUCTURES OR BUILDINGS.
 3. CONTROL JOINTS TO BE LOCATED AT MINIMUM INTERVALS OF 3M

5 TYP. UNIT PAVING WITH CONCRETE BASE - PEDESTRIAN LOADING ONLY
 L-202 SCALE NTS



62" FlexBollard® with Sign Post

Handles most steel regulatory and traffic signs
 Rigid bollard appearance deters vehicle impact
 Flexes when hit from any angle
 Withstands high winds
 Eliminates replacement costs — no more bent bollards
 Protects vehicles
 Takes minutes to install without special tools

Specifications:

9" x 9" x 10" steel base plate
 52" x 7" Post Guard cover
 8 foot steel 1.50" round galvanized post (silver)
 Carbon steel torsion spring with 1/2" aluminum tear-away bolts
 Overall height - 102"
 Includes mounting hardware for either concrete, asphalt or natural ground surfaces

*Post Guard is available in all standard color and stripe combinations




6 TYP. ACCESSIBLE PARKING SIGNAGE
 L-202 SCALE NTS

SIGN COLOUR SPECIFICATIONS: WHITE BACKGROUND, BLACK LETTER, LEGEND, TEXT AND BORDER, RED, ANNULAR BAND WITH INTERDICTORY STROKE, BLUE SYMBOL BACKGROUND AND OUTLINE, ENTIRE SIGN FACE TO BE OF REFLECTIVE MATERIAL.




Stantec Consulting Ltd.
 100-401 Wellington Street West
 Toronto, ON M5V 1E7
 Tel: (416) 596-6888 • www.stantec.com

Copyright Reserved
 The Copyrights to all designs and drawings are the property of Stantec. Reproduction or use for any purpose other than that authorized by Stantec is forbidden. The Contractor shall verify and be responsible for all dimensions, DO NOT scale the drawing - any errors or omissions shall be reported to Stantec without delay.

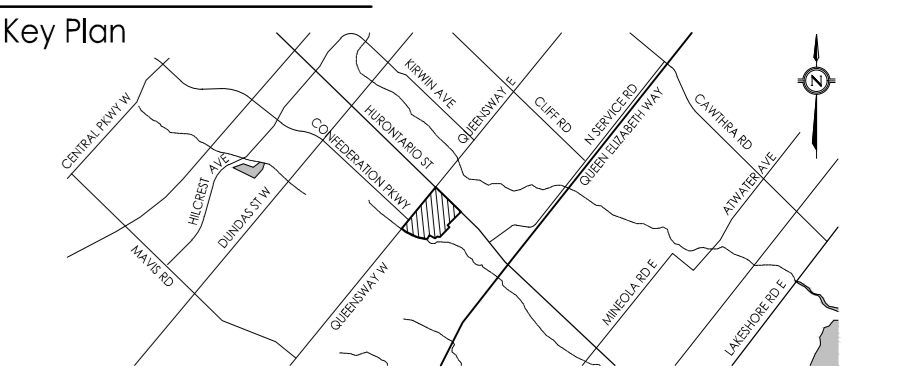

Legend

Issue/Revision	By	App'd	Date
1	EA	JY	2021-12-06
2	EA	JY	2021-09-22
3	EA	JY	2021-09-22
4	EA	JY	2021-09-22
5	EA	JY	2021-09-22
6	EA	JY	2021-09-22
7	EA	JY	2021-09-22
8	EA	JY	2021-09-22
9	EA	JY	2021-09-22
10	EA	JY	2021-09-22
11	EA	JY	2021-09-22
12	EA	JY	2021-09-22
13	EA	JY	2021-09-22
14	EA	JY	2021-09-22
15	EA	JY	2021-09-22
16	EA	JY	2021-09-22
17	EA	JY	2021-09-22
18	EA	JY	2021-09-22
19	EA	JY	2021-09-22
20	EA	JY	2021-09-22

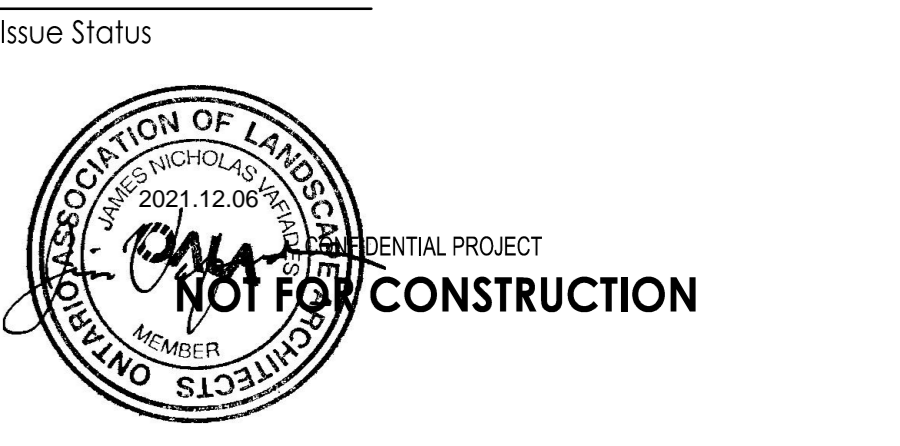

Client/Project Logo
 Client/Project
 TRILLIUM HEALTH PARTNERS
 NEW MISSISSAUGA HOSPITAL TOWER
 PAM 21-323 W7
 100 QUEENSWAY WEST & 2250 HURONTARIO ST
 MISSISSAUGA ON
 Title
 LANDSCAPE DETAILS