LANDSCAPE SPECIFICATIONS:

All sod shall conform to the standards of the Nursery Sod Growers Association of Ontario. All sodded areas shall be prepared with a minimum of 100mm of topsoil and sodded with #1 bluegrass – fescue nursery sod.

Unless soil tests suggest otherwise, fertilizer shall be applied as follows: Sodded areas: 11–8–4 (11% nitrogen, 8% phosphorous, 4% potash) at 4.5 kg/m2. Planting beds: 7–7–7 (7% nitrogen, 7% phosphorous, 7% potash) at 0.12 kg/m3, and bone meal at 0.58 kg/m3 of planting soil mixture as outlined below.

All planting beds are to be continuous, and excavated to a minimum depth of 450mm unless noted otherwise. Planting beds are to be filled with a soil mixture composed of six (6) parts sand loam, two (2) parts well rotted manure, and one (1) part peat moss, in addition to the fertilizers specified above.


All plant material shall conform to the standards of the Canadian Nursery Trades Association. All plant material is to be clay grown stock. Install all plant material as shown on the planting plan and details. Use only viable nursery stock grown in strict accordance with proper horticultural practices which is free from damage, pests, and disease.


All beds are to be covered with a 75mm depth of clean, shredded pine bark mulch by Gro–Bark or approved equal unless noted otherwise. Guying and staking of trees shall conform to the planting details. Wrap all deciduous trees as per the specifications of the Ontario Landscape Contractors Association.


The contractor will observe proper maintenance procedures for all newly constructed landscape work as per Section 1E (Maintenance Work) of Landscape Ontario's specifications. Unless otherwise noted, this will apply during the construction period only. The contractor shall maintain all planting and sodding until final acceptance is granted by the Landscape Architect.

The contractor will be responsible for the protection of all plant material from damages resulting from winter conditions as well as rodents during the warranty period. Apply "Skoat" rodent deterrent formula (or approved equal) to all coniferous trees and all shrubs in late October as per manufacturer's directions.

The contractor shall provide a full one year guarantee (or two years if required by the municipality or owner) on all landscape works, beginning on the date that final acceptance is granted by the Landscape Architect.

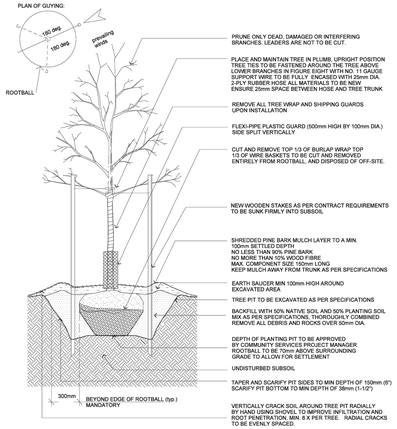

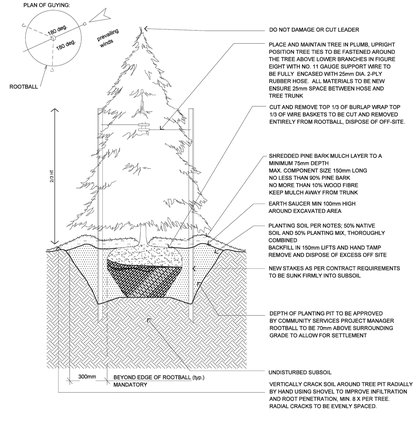

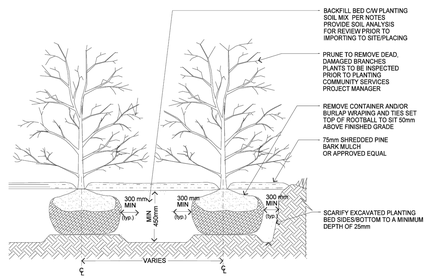

PROPOSED DECIDUOUS TREE

PROPOSED SHRUB BED

CSW CONCRETE SIDEWALK


SOD SODDED AREA

EXISTING DECIDUOUS TREE TO REMAIN

EXISTING CONIFEROUS TREE TO REMAIN

TERRASEEDING

C COMPENSATION TREE

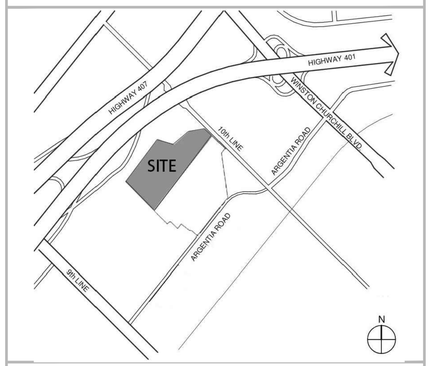

GENERAL NOTES

1. Do not scale the drawings. All dimensions are in millimetres unless noted otherwise.
2. This drawing is to be read in conjunction with the overall master plan and engineering drawings prepared by the project engineer and site plans prepared by the project architect.
3. The contractor shall check and verify all existing and proposed grading and conditions on the project and immediately report any discrepancies to the consultant before proceeding with any work.
4. The contractor is to be aware of all existing and proposed services and utilities. The contractor is responsible for having all underground services and utility lines staked by each agency having jurisdiction prior to commencing work.
5. This drawing is to be used for development approval only. For layout of all work refer to construction drawings.
6. Plant quantities indicated on the plan supercede the quantities from the plant list (report any discrepancies to the landscape architect).
7. Do not leave any holes open overnight.
8. Keep area outside construction zone clean and useable by others at all times. Contractor shall throughly clean areas surrounding the construction zone at the end of each work day.
9. Contractor to make good any and all damages outside of the development area that may occur as a result of construction at no extra cost.
10. This drawing is Copyright MHBC 2026

REVISION NO.	DATE	ISSUED / REVISION	BY
6.	SEPTEMBER 25, 2026	ISSUED FOR SPA RESUBMISSION - INDUSTRIAL	CC
5.	SEPTEMBER 09, 2026	ISSUED FOR SPA RESUBMISSION - DATA CENTRE	CC
4.	MARCH 25, 2026	ISSUED FOR SPA RESUBMISSION - INDUSTRIAL	CC

MHBC PLANNING URBAN DESIGN & LANDSCAPE ARCHITECTURE
230-7050 WESTON ROAD WOODBRIDGE, ON, L4L 8G7 | P: 905 761 5588 F: 905 761 5589 | WWW.MHBCPLAN.COM

STAMP

ASSOCIATION OF LANDSCAPE ARCHITECTS ONTARIO NICOLA A WISE MEMBER

ISSUED FOR SPA ONLY
NOT FOR CONSTRUCTION

All drawings and specifications are instruments of service and will remain the property of MHBC Planning and must be returned at the completion of the work. This drawing shall not be used for construction purposes unless the drawings are marked 'Issued for Construction' and the professional seal is signed and dated by the landscape architect.

DATE	SEPTEMBER 2026
DRAWN BY	CC
PLAN SCALE	--
FILE NO.	12212BK SP 25-65 W9
CHECKED BY	N.M.
OWNER	PROLOGIS 185 THE WEST MALL SUITE 700, TORONTO, ON

PROJECT

0 ARGENTIA ROAD
MISSISSAUGA, ON

FILE NAME

LANDSCAPE DETAILS

DWG NO.

L213

1 LANDSCAPE SPECIFICATIONS
L213 N.T.S

THE CORPORATION OF THE CITY OF MISSISSAUGA

ACCESSIBLE PARKING SIGN REQUIREMENTS

ACCESSIBLE PARKING BY-LAW # 10-2016

Accessible Parking Signs shall be mounted on a level wall surface or mounted on a permanent post, pillar, or other suitable surface, conforming to the requirements or regulations made under the Highway Traffic Act and the Accessibility for Ontarians with Disabilities Act, and be located:

- At a height of 1200 mm (47 in.) from the ground/floor surface to the bottom edge of the sign;
- If mounted on a post, the post shall be colour contrasted with the background environment;
- For perpendicular parking centred on the parking space; and
- For parallel parking located toward the end of the parking space, on the opposite side from the access aisle.

Each **Type 'A' Parking Space** shall have two (2) 150 mm x 300 mm (6 inches x 11 ¾ inches) signs, on the same sign post/wall mount and located immediately below the sign described in sections 9 and 11, with the words "Van Accessible" followed underneath with "Maximum Fine $5,000.00", as illustrated in Schedule "C" of Accessible Parking By-law 10-2016.


Each **Type 'B' Parking** Space shall have a 150 mm x 300 mm (6 inches x 11 ¾ inches) sign, on the same sign post/wall mount and located immediately below the sign described in sections 9 and 11, with the words "Maximum Fine $5,000.00", as illustrated in Schedule "C" of Accessible Parking By-law 10-2016.


Sign Face:

- 0.064 mm gauge aluminum sign blank
- white background
- holes-metro punched

Mounting:

Secure the sign face to a post or wall with two galvanized 12 mm hex. head bolts and nuts with flat washers on both sides.

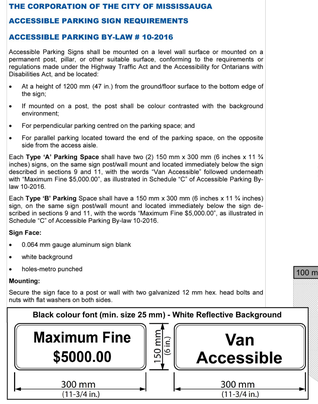


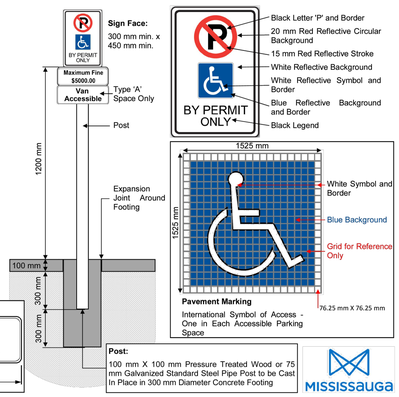


K:\PLAN\DEV\CONTL\GROUP\WPDATA\LO\law\Miscellaneous\AccessibleParkingSign10_2016_lf1comp.pub

MISSISSAUGA

5 ACCESSIBLE PARKING SIGN
L213 N.T.S

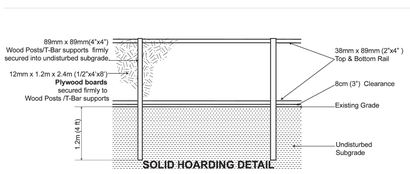

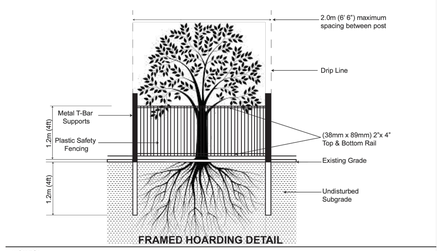

NOTES:

1. Hoarding details to be determined following initial site inspection.
2. Private tree hoarding to be approved by Development & Design ; City tree hoarding to be approved by Community Services Dept.
3. Hoarding must be supplied, installed and maintained by the applicant throughout all phases of construction. **Inspection must be conducted by the Development and Design Division prior to removing any/all private hoarding.**
4. Do not allow water to collect and pond behind or within hoarding.
5. **T-bar supports are acceptable alternative to 4x4 posts. U-shaped metal supports will not be accepted.**
6. **Plywood** must be utilized for 'solid' hoarding. OSB/Chipboard will not be accepted for solid hoarding. Plywood sheets must be installed on "construction" side of frame.
7. Applicant is responsible to ensure utility locates are completed within city boulevard prior to installing framed hoarding.

9 TREE PROTECTION FENCING
L213 N.T.S

2 DECIDUOUS TREE PLANTING
L213 N.T.S

10 TERRASEEDING
L213 N.T.S

TABLELAND PRAIRIE GRASS NATIVE SEED MIXTURE (OSC #8155)

APPLICATION RATE 25 KG/HA

BOTANNICAL NAME	COMMON NAME
BIG BLUESTEM	ANDROPOGON GERARDII
CANADA WILD RYE	ELYMUS CANADENSIS
INDIANGRASS	SORGHASTRUM NUTANS
LITTLE BLUESTEM	SCHIZACHYRIUM SCOPARIUM
PRAIRIE CORDGRASS	SPARTINA PECTINATA
SWITCHGRASS	PANICUM VIRGATUM

STORMWATER POND MIXTURE OSC #8190

APPLICATION RATE 25 KG/HA

BOTANNICAL NAME	COMMON NAME	% OF MIX
FOX SEDGE	CAREX VULPINOIDEA	5%
CANADA WILD RYE	ELYMUS VIRGINICUS	25%
CANADA BLUEGRASS	POA COMPRESSA	10%
BIG LEAF MOUNTAIN MINT	PYCANTHEMUM MUTICUM	1%
SWITCHGRASS	PANICUM VIRGATUM	25%
CANADA BLUEJOINT	CALAMAGROSTIS CANADENSIS	2%
BLACK EYED SUSAN	RUDBECKIA HIRTA	5%
NEW ENGLAND ASTER	ASTER NOVAE–ANGLAE	5%
CANADA GOLDENROD	SOLIDAGO CANADENSIS	2%

SEEDING SPECIFICATIONS

PNEUMATICALLY APPLIED SUBSTRATE (TERRASEEDING OR APPROVED EQUAL) TO BE APPLIED AT A RATE OF 30KG/HA AT A DEPTH OF 50MM.

THE CONTRACTOR SHALL NOT CARRY OUT THE WORK UNDER ADVERSE WEATHER CONDITIONS SUCH AS HIGH WIND, FROZEN GROUND OR GROUND COVERED WITH SNOW, ICE OR STANDING WATER.

A SOIL TEST SHOULD BE PERFORMED BY A COMPETENT CONTRACTOR TO VERIFY MIXTURE AND PERCENTAGES REQUIRED.

PREPARATION:
GRADE SUB–GRADE, ELIMINATE UNEVEN AREAS AND LOW SPOTS, ENSURE POSITIVE DRAINAGE. REMOVE DEBRIS, ROOTS, BRANCHES, STONES IN EXCESS OF 50MM DIAMETER AND OTHER DELETERIOUS MATERIALS. REMOVE SUBSOIL THAT HAS BEEN CONTAMINATED WITH OIL, GASOLINE OR CALCIUM CHLORIDE, DISPOSE OF REMOVED MATERIAL AS DIRECTED BY LANDSCAPE ARCHITECT.

GRADE SUB–GRADE FOR SEEDING TO A UNIFORM SURFACE AND REMOVE VEGETATION WHICH MAY INTERFERE WITH SEEDING OPERATIONS. LOOSEN SOIL TO DEPTH OF 25MM MINIMUM AND REMOVE STONES AND FOREIGN MATERIAL WHICH PROTRUDE MORE THAN 75MM ABOVE THE SURFACE.


CONTRACTOR TO SUPPLY AND INSTALL 100MM (4") LAYER OF TOPSOIL OVER THE AREA TO BE SEEDED PRIOR TO SEEDING. SEEDING SHALL OCCUR IMMEDIATELY FOLLOWING INSTALLATION OF TOPSOIL. IF A DELAY OCCURS, THE CONTRACTOR IS RESPONSIBLE FOR REMOVING ALL WEEDS PRIOR TO SEEDING, SHOULD THEY FAIL TO EXECUTE SEEDING IN A TIMELY MANNER.

MAINTENANCE:
SEEDED AREAS TO BE MAINTAINED BY CONTRACTOR ENSURING ADEQUATE WATER, FERTILIZER, ANNUAL MOWINGS (2–3 YEAR ONE, AND 1–2 YEAR TWO), MAINTENANCE AND REPAIR UNTIL SEEDED AREAS ARE PROPERLY ESTABLISHED. AREAS SEEDED IN FALL WILL BE ACCEPTED IN FOLLOWING SPRING, ONE MONTH AFTER START OF GROWING SEASON PROVIDED ACCEPTANCE CONDITIONS ARE FULFILLED.


NOTES

- ALL SEED MIXTURES TO BE SUPPLIED BY ONTARIO SEED COMPANY LTD. (519) 886–0557 (OR APPROVED EQUAL).
- MIX IS DESIGNED TO BE APPLIED AS PER MANUFACTURERS SPECIFICATIONS.
- SEED ANNUAL BARLEY AS A NURSE CROP AND TO ENHANCE EROSION CONTROL AT 25 kg per hectare.
- PREPARE ALL DISTRUBED AREAS TO BE SEEDED WITH MIN 100MM OF SOIL/COMPOST MIXTURE.


3 CONIFEROUS TREE PLANTING
L213 N.T.S

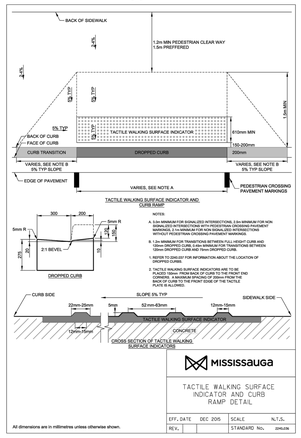

6 CURB RAMP AND TACTILE INDICATOR
L213 N.T.S

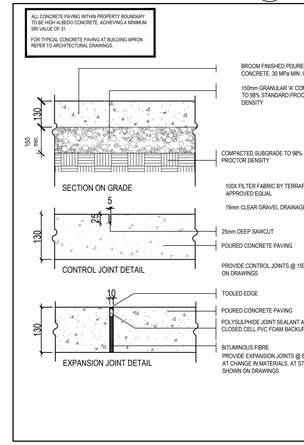


11 MAGLIN 100 BIKE RACK
L213 N.T.S

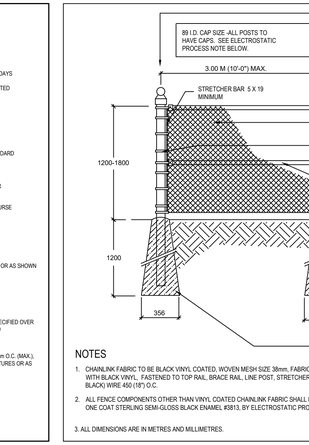

7 CONCRETE PAVING
L213

8 1.2M-1.8M CHAIN LINK FENCE
L213 WHERE 1.2M FENCE IS TO BE MOUNTED TO WALL TO BE CORED AND FILLED WITH NON-SHRINK GROUT

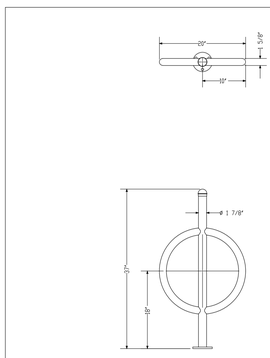


MAGLIN SITE FURNITURE INC.
WWW.MAGLIN.COM
TEL: 800-716-5506
FAX: 877-260-9393

THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPRIETARY PROPERTY OF M.S.F. FURNITURE INC. AND IS NOT TO BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN PERMISSION OF MAGLIN SITE FURNITURE INC. IS PROHIBITED

TITLE:
BIKE RACK, 100, SURFACE MOUNT
PART NO.
MSR100-S
SCALE: NTS
WEIGHT:
14.4KG,8S
DATE:
2014-07-03

12 MAGLIN 210 PICNIC BENCH
L213 N.T.S

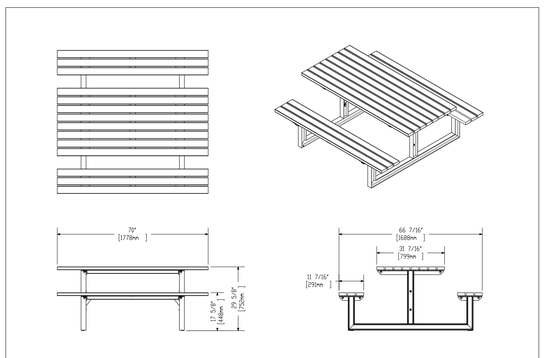

MAGLIN SITE FURNITURE INC.
WWW.MAGLIN.COM
TEL: 800-716-5506
FAX: 877-260-9393

THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPRIETARY PROPERTY OF M.S.F. FURNITURE INC. AND IS NOT TO BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN PERMISSION OF MAGLIN SITE FURNITURE INC. IS PROHIBITED

TITLE:
CLUSTER SEATING, 210, SURFACE MOUNT, WOOD
PART NO.
MLP1210-S-W
SCALE: NTS
WEIGHT:
377.47LBS
DATE:
2014-08-22