


TREE INVENTORY NOTES

Tree #	Common Name	Botanical Name	DBH (CM)	Condition	Comments	Recommendation
541	Red Oak	Quercus rubra	12	F	Minor deadwood in canopy	Retain
542	Red Oak	Quercus rubra	14	F	Minor deadwood in canopy	Retain
543	Red Oak	Quercus rubra	14	F	Moderate deadwood in canopy	Remove due to construction
544	Red Oak	Quercus rubra	16	F	Minor to moderate deadwood in canopy	Remove due to construction
559	Shagbark Hickory	Carya ovata	34	F	Minor deadwood in canopy	Remove due to construction
560	Shagbark Hickory	Carya ovata	46	FP	Moderate deadwood in canopy	Remove due to construction
561	Shagbark Hickory	Carya ovata	22	F	Minor deadwood throughout	Remove due to construction
562	Shagbark Hickory	Carya ovata	47	F	Moderate deadwood in canopy	Remove due to construction
553	Basswood	Tilia americana	15	F		Remove due to construction
564	Common Buckthorn	Rhamnus cathartica	19	F	3 stem at base, minor deadwood in canopy	Remove due to construction
565	Common Buckthorn	Rhamnus cathartica	21	F	Minor to moderate deadwood in canopy	Remove due to construction
566	Common Buckthorn	Rhamnus cathartica	22	F	Multi-stem at base, minor to moderate deadwood in canopy	Remove due to construction
567	Shagbark Hickory	Carya ovata	22	F	Minor deadwood in canopy	Remove due to construction
568	American Elm	Ulmus americana	18	F		Remove due to construction
569	Common Buckthorn	Rhamnus cathartica	14	F	2 stem at base, minor deadwood in canopy	Remove due to construction
570	Shagbark Hickory	Carya ovata	59	F		Remove due to construction
571	Shagbark Hickory	Carya ovata	47	F	Mid lean	Remove due to construction
572	Shagbark Hickory	Carya ovata	22	F	Mid lean, minor deadwood throughout	Remove due to construction
573	Shagbark Hickory	Carya ovata	38	F	2 stem at 1.1 metres	Remove due to construction
574	Shagbark Hickory	Carya ovata	47	F		Remove due to construction
575	Shagbark Hickory	Carya ovata	48	F		Remove due to construction
576	Shagbark Hickory	Carya ovata	50	F	Minor deadwood in canopy	Remove due to construction
577	Burr Oak	Quercus macrocarpa	63	F	Minor deadwood throughout	Remove due to construction
578	Basswood	Tilia americana	23	F	Mild to moderate lean, 2 stem at 0.3 metres	Remove due to construction
579	Basswood	Tilia americana	18	F		Remove due to construction
580	Burr Oak	Quercus macrocarpa	19	F		Remove due to construction
581	Shagbark Hickory	Carya ovata	19	F		Remove due to construction
582	Shagbark Hickory	Carya ovata	31	F		Remove due to construction
583	Shagbark Hickory	Carya ovata	46	F		Remove due to construction
584	Shagbark Hickory	Carya ovata	43	F		Remove due to construction
585	Shagbark Hickory	Carya ovata	34	F	Minor deadwood throughout	Remove due to construction
586	Shagbark Hickory	Carya ovata	52	F	Minor deadwood throughout, 3 stem at base	Remove due to construction
587	Shagbark Hickory	Carya ovata	67	F	Minor deadwood throughout	Remove due to construction
588	Shagbark Hickory	Carya ovata	43	FP	Minor deadwood throughout, previous limb failures evident, 2 stem at 1.0 metre	Retain (injure)
589	Basswood	Tilia americana	19	F		Remove due to construction
590	Shagbark Hickory	Carya ovata	18	F		Remove due to construction
591	Shagbark Hickory	Carya ovata	15	F		Remove due to construction
592	Basswood	Tilia americana	15	F		Remove due to construction
593	Burr Oak	Quercus macrocarpa	23	F	Minor to moderate deadwood throughout	Remove due to construction
594	Shagbark Hickory	Carya ovata	31	F		Remove due to construction
595	Shagbark Hickory	Carya ovata	36	F	2 stem at 0.5 metres	Remove due to construction
596	Shagbark Hickory	Carya ovata	33	F		Retain
597	Shagbark Hickory	Carya ovata	44	F	Minor deadwood throughout	Remove due to construction
O6	Basswood	Tilia americana	~78	P	Suckers throughout, main leader previously failed, minor deadwood throughout	Retain (injure)
O7	Basswood	Tilia americana	18	F		Retain
O8	Burr Oak	Quercus macrocarpa	~72	F	Minor deadwood throughout	Retain (injure)
O9	Burr Oak	Quercus macrocarpa	~58	FP	Moderate deadwood throughout	Retain (injure)
O10	Shagbark Hickory	Carya ovata	37	F		Retain
O11	Burr Oak	Quercus macrocarpa	84	F	Minor to moderate deadwood throughout, cavity at base on northwest side of tree	Retain (injure)
O12	Shagbark Hickory	Carya ovata	57	F	Minor to moderate deadwood throughout	Remove due to construction

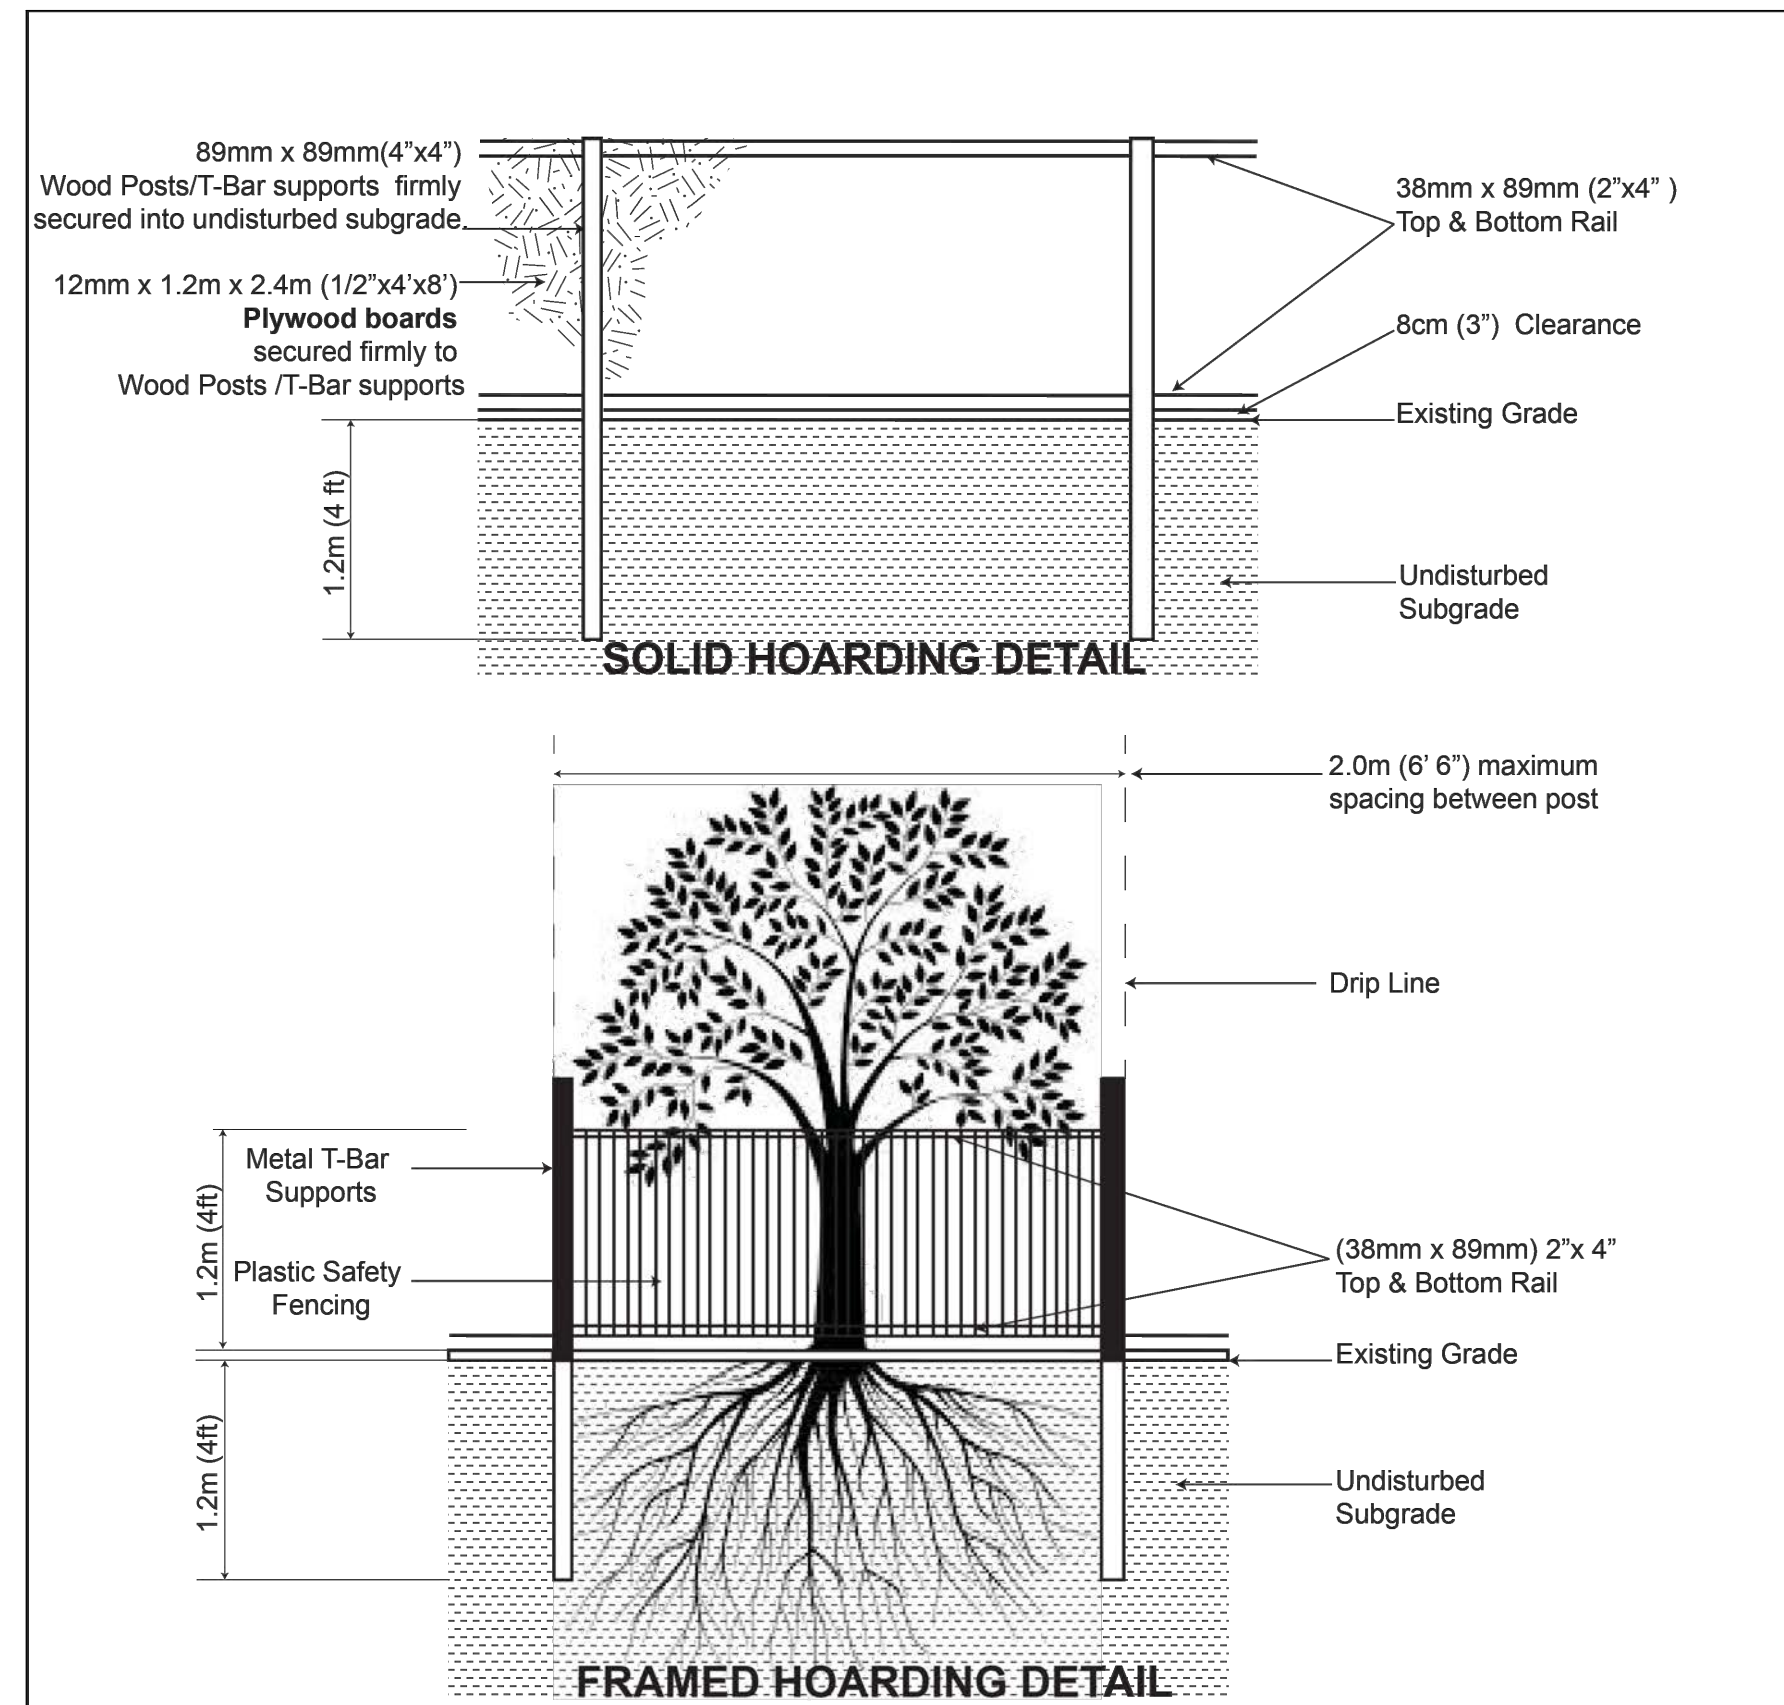

- NOTES:**
- Hoarding details to be determined following initial site inspection.
 - Private tree hoarding to be approved by Development & Design ; City tree hoarding to be approved by Community Services Dept.
 - Hoarding must be supplied, installed and maintained by the applicant throughout all phases of construction. **Inspection must be conducted by the Development and Design Division prior to removing any/all private hoarding.**
 - Do not allow water to collect and pond behind or within hoarding.
 - T-bar supports are acceptable alternative to 4x4 posts. U-shaped metal supports will not be accepted.**
 - Plywood** must be utilized for 'solid' hoarding. OSB/Chipboard will not be accepted for solid hoarding. Plywood sheets must be installed on "construction" side of frame.
 - Applicant is responsible to ensure utility locates are completed within city boulevard prior to installing framed hoarding.

TREE PRESERVATION HOARDING



SCALE : N.T.S DATE : June 2017

1
TI-6
TREE PROTECTION DETAIL
CITY OF MISSISSAUGA STANDARD

Tree Protection Note:

The applicant is responsible for ensuring that tree protection hoarding is maintained throughout all phases of demolition and construction in the location and condition as approved by the Planning and Building Department. No materials (building materials, soil, etc.) may be stockpiled within the area of hoarding. Failure to maintain the hoarding as originally approved or the storage of materials within the hoarding will be cause for the Letter of Credit to be held for two years following completion of all site works. Hoarding must be inspected prior to the removal of any tree hoarding from the site.


Owner's Signature: _____

Date: _____

2
TI-6
TREE PROTECTION NOTE

LEGEND

KEY PLAN

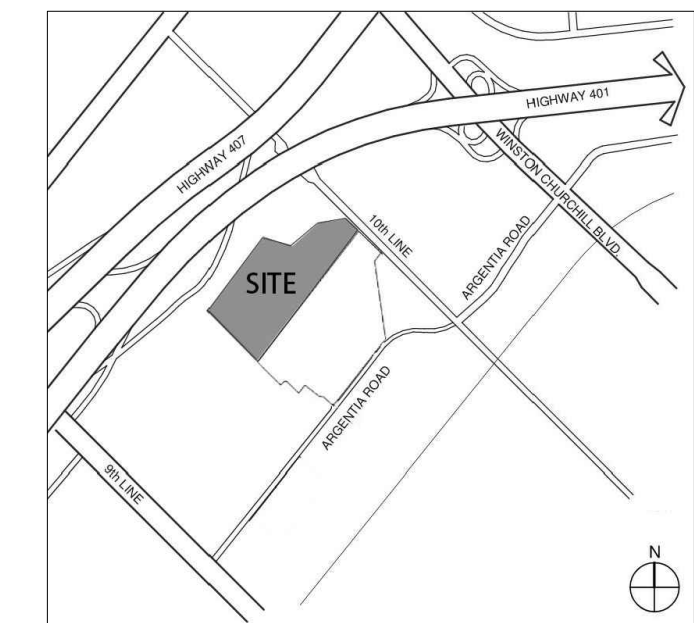

GENERAL NOTES

- Do not scale the drawings. All dimensions are in millimetres unless noted otherwise.
- This drawing is to be read in conjunction with the overall master plan and engineering drawings prepared by the project engineer and site plans prepared by the project architect.
- The contractor shall check and verify all existing and proposed grading and conditions on the project and immediately report any discrepancies to the consultant before proceeding with any work.
- The contractor is to be aware of all existing and proposed services and utilities. The contractor is responsible for having all underground services and utility lines staked by each agency having jurisdiction prior to commencing work.
- This drawing is to be used for development approval only. For layout of all work refer to construction drawings.
- Plant quantities indicated on the plan supercede the quantities from the plant list (report any discrepancies to the landscape architect).
- Do not leave any holes open overnight.
- Keep area outside construction zone clean and useable by others at all times. Contractor shall thoroughly clean areas surrounding the construction zone at the end of each work day.
- Contractor to make good any and all damages outside of the development area that may occur as a result of construction at no extra cost.
- This drawing is Copyright MHBC 2026.

2.	MARCH 2, 2026	ISSUED FOR SPA	NV
1.	AUGUST 14, 2025	ISSUED FOR SPA	NV
REVISION NO.	DATE	ISSUED / REVISION	BY


**PLANNING
URBAN DESIGN
& LANDSCAPE
ARCHITECTURE**
230-7050 WESTON ROAD WOODBRIDGE, ON, L4L 6G7 | P: 905.761.5588 F: 905.761.5589 | WWW.MHBCPLAN.COM

STAMP		DATE	MARCH 2026
		DRAWN BY	NV
		PLAN SCALE	-
		FILE NO.	12212BK
		CHECKED BY	N.M.
		OWNER	PROLOGIS 185 THE WEST MALL SUITE 700, TORONTO, ON

PROJECT

7564 TENTH LINE WEST
MISSISSAUGA, ON

FILE NAME	TREE INVENTORY, PROTECTION, AND REMOVALS	DWG NO.	TI-6
------------------	---	----------------	-------------